



(12) **United States Patent**  
**Honeycutt et al.**

(10) **Patent No.:** **US 9,032,666 B2**  
(45) **Date of Patent:** **May 19, 2015**

- (54) **GATE**
- (71) Applicant: **Safe Rack, LLC**, Andrews, SC (US)
- (72) Inventors: **Robert W. Honeycutt**, Pawleys Island, SC (US); **Carson Allan Jones**, Charleston, SC (US)
- (73) Assignee: **Safe Rack LLC**, Andrews, SC (US)
- (\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

3,674,294	A *	7/1972	Kirkham	403/104
3,993,103	A *	11/1976	Hammer	138/89
4,122,630	A *	10/1978	Parisien	49/386
4,134,703	A *	1/1979	Hinners	403/104
4,294,560	A *	10/1981	Larkin	403/104
4,465,262	A *	8/1984	Itri et al.	256/24
4,531,550	A *	7/1985	Gartner	138/89
4,611,431	A *	9/1986	Lauro	49/55
5,022,185	A *	6/1991	Oatman	49/425
5,117,585	A *	6/1992	Andrisin, III	49/55
5,119,861	A *	6/1992	Pino	138/89

(Continued)

**OTHER PUBLICATIONS**

- (21) Appl. No.: **13/768,179**
- (22) Filed: **Feb. 15, 2013**

File History of U.S. Appl. No. 61/366,612, filed Jul. 22, 2010, entitled "Gangway Bearing Retainer Plate".

(Continued)

- (65) **Prior Publication Data**  
US 2013/0219790 A1 Aug. 29, 2013

*Primary Examiner* — Katherine Mitchell

*Assistant Examiner* — Justin Rephann

(74) *Attorney, Agent, or Firm* — Nelson Mullins Riley & Scarborough, LLP

- Related U.S. Application Data**
- (60) Provisional application No. 61/599,276, filed on Feb. 15, 2012.
- (51) **Int. Cl.**  
**E06B 11/04** (2006.01)  
**E06B 11/00** (2006.01)
- (52) **U.S. Cl.**  
CPC ..... **E06B 11/045** (2013.01); **E06B 11/00** (2013.01)
- (58) **Field of Classification Search**  
CPC ..... E06B 11/045; E06B 2003/7096; E06B 2009/002; E06B 1/56  
USPC ..... 49/55, 57, 463, 465  
See application file for complete search history.


- (57) **ABSTRACT**

A gate may include a first supporting arm and an adjustable arm. The first supporting arm may include an interior surface and an interior cavity. The adjustable arm may include an insertable end, an adjustable compression member and a compression fitting. The insertable end may be configured to be inserted into the interior cavity of the first supporting arm. The adjustable compression member may be disposed at the insertable end. The compressing fitting may be configured to adjust the adjustable compression member. When the insertable end is inserted into the interior cavity of the first supporting arm, the adjustable compression member is adjusted to compress against the interior surface so that the adjustable arm is fixed relative to the first supporting arm.

- (56) **References Cited**  
**U.S. PATENT DOCUMENTS**

922,544	A *	5/1909	Turner	138/90
2,503,997	A *	4/1950	Bu Miller	248/188.5
2,574,807	A *	11/1951	Woodruff	49/55
2,923,323	A *	2/1960	Franck	138/89

**22 Claims, 25 Drawing Sheets**

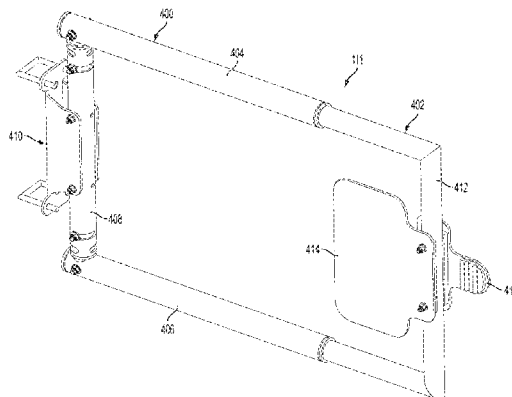

(56)

**References Cited****U.S. PATENT DOCUMENTS**

5,224,516	A *	7/1993	McGovern et al.	138/97
5,272,840	A *	12/1993	Knoedler et al.	49/463
5,575,113	A *	11/1996	Huang	49/55
5,692,856	A *	12/1997	Newman et al.	403/352
5,704,164	A *	1/1998	Huang	49/55
5,921,027	A *	7/1999	Siebenahler	49/160
6,056,038	A *	5/2000	Foster et al.	160/351
6,073,396	A *	6/2000	Kietzmann	49/381
6,112,460	A *	9/2000	Wagnitz	49/55
6,233,874	B1 *	5/2001	Johnson, Jr.	49/465
6,378,560	B1 *	4/2002	Ferrer	138/89
6,474,021	B2 *	11/2002	Homeyer	49/57
7,334,624	B2 *	2/2008	Waldman et al.	160/144
7,422,048	B2 *	9/2008	Andersen	160/377
7,658,220	B2 *	2/2010	Yates	160/377
7,950,095	B2	5/2011	Honeycutt et al.	
8,046,858	B2	11/2011	Honeycutt	
8,261,393	B2	9/2012	Honeycutt et al.	
8,297,336	B2 *	10/2012	Yates	160/377
8,341,821	B2	1/2013	Honeycutt	
8,418,407	B2 *	4/2013	Wang	49/465
8,561,349	B2 *	10/2013	Flannery et al.	49/55
8,578,656	B2 *	11/2013	Yates et al.	49/465
2003/0230328	A1 *	12/2003	Chen	135/67
2005/0028947	A1	2/2005	Waldman et al.	

2005/0207829	A1	9/2005	Lenhart	
2005/0220917	A1 *	10/2005	Pierik et al.	425/88
2007/0144691	A1 *	6/2007	Yates	160/377
2008/0244983	A1 *	10/2008	Peterson	49/381
2008/0256865	A1 *	10/2008	Trujillo et al.	49/55
2009/0071074	A1 *	3/2009	Yates	49/55
2009/0158665	A1 *	6/2009	Wu	49/55
2009/0217591	A1 *	9/2009	LaCook	49/50
2009/0241610	A1 *	10/2009	Watts et al.	70/91
2010/0031455	A1	2/2010	Honeycutt et al.	
2010/0083577	A1 *	4/2010	Flannery et al.	49/130
2010/0316438	A1 *	12/2010	Sohn	403/109.1
2011/0258834	A1 *	10/2011	Allen et al.	29/525
2012/0056144	A1	3/2012	Woods	
2013/0045041	A1 *	2/2013	Sohn	403/109.1
2013/0086842	A1 *	4/2013	Morrone, III	49/55

**OTHER PUBLICATIONS**

File History of U.S. Appl. No. 61/374,541, filed Aug. 17, 2010, entitled "Articulating Cage".

U.S. Appl. No. 12/837,480, filed Jul. 15, 2010 entitled "Mobile Access Unit and Cage".

Owner's Manual, "Yellow Gate", www.yellowgate.com, Doc. No. YG-2011.

International Search Report (Form PCT/ISA/210) dated May 6, 2013 for corresponding PCT application serial No. PCT/US2013/026306.

\* cited by examiner

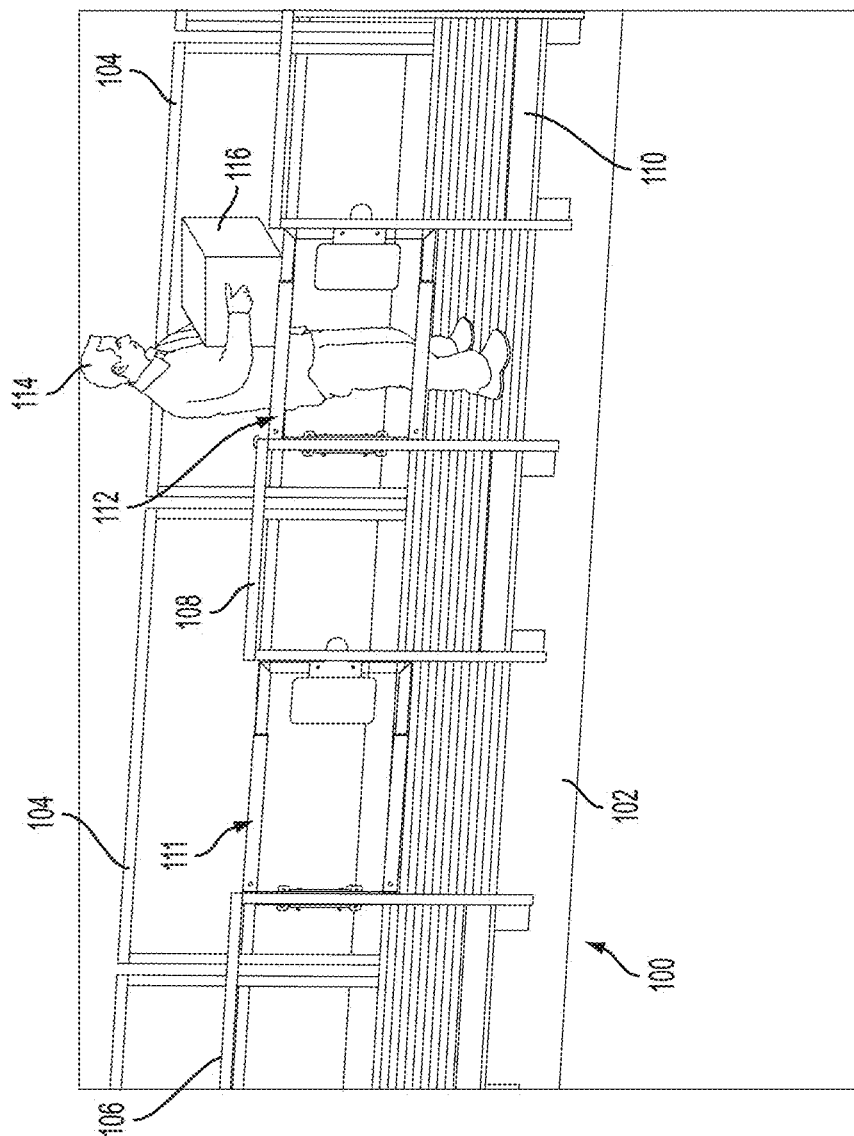


FIG. 1A

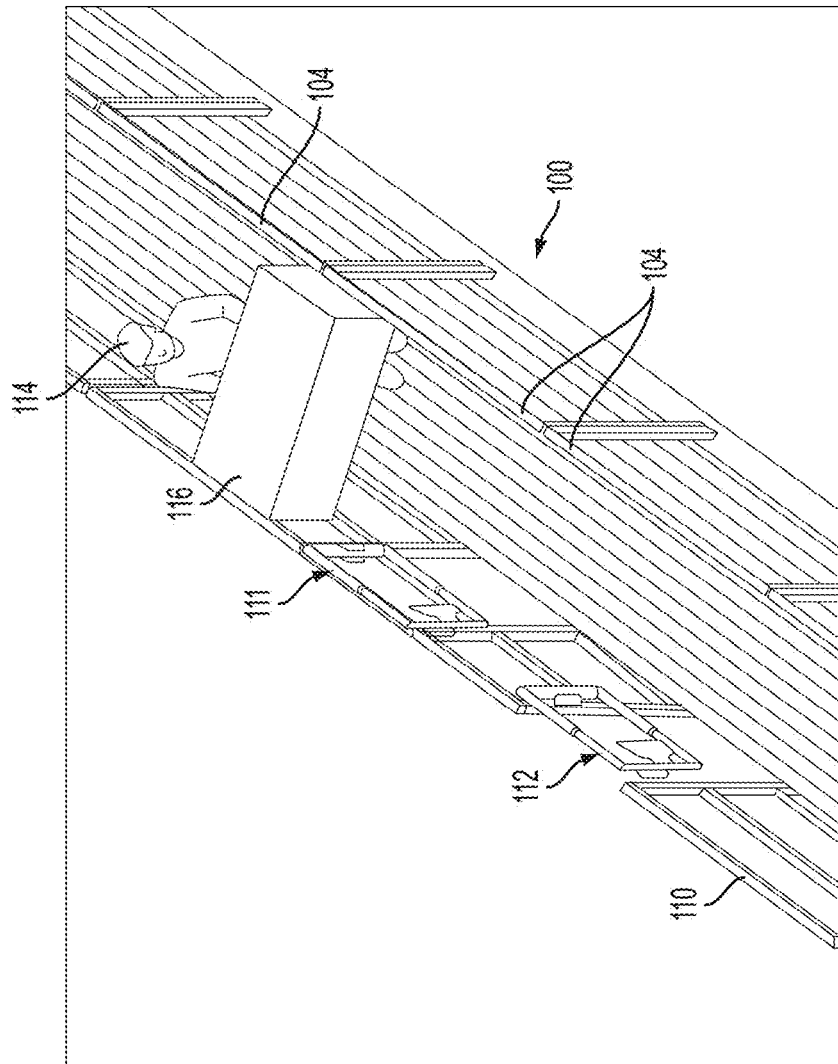


FIG. 1B




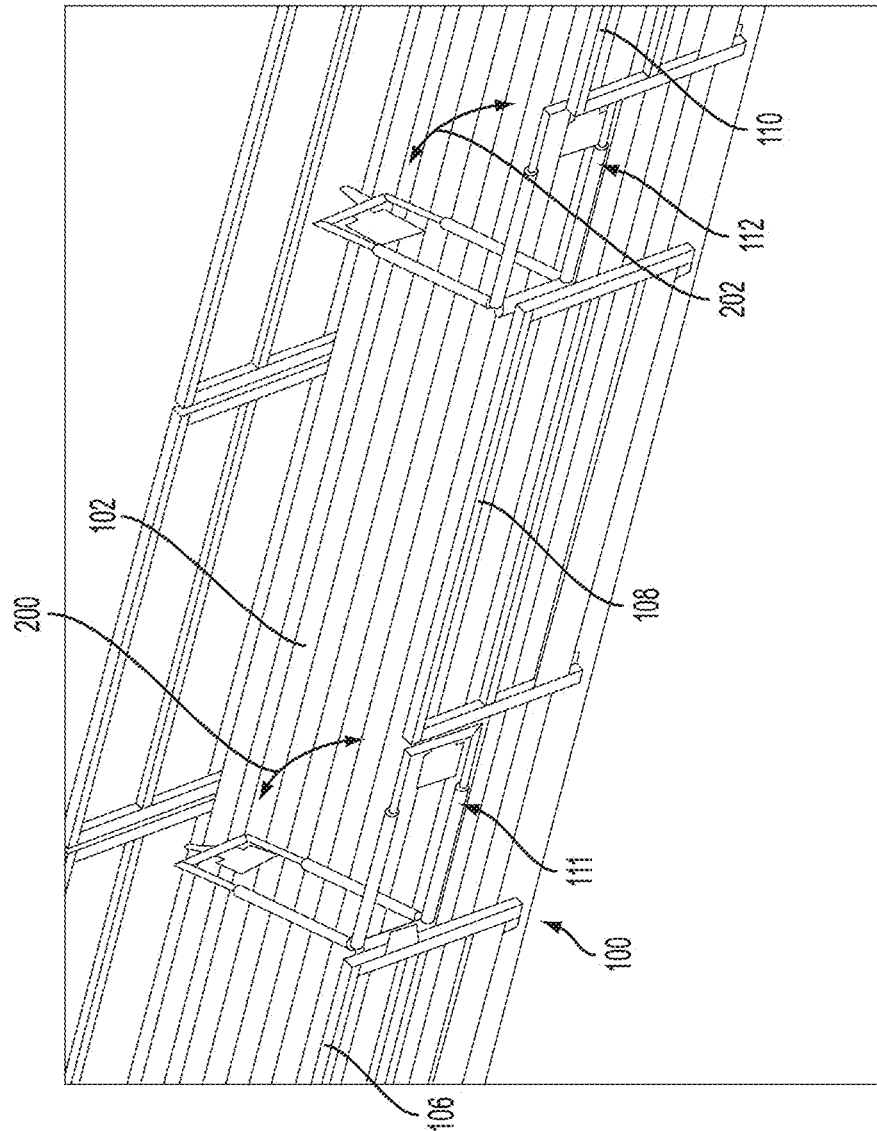


FIG. 2A

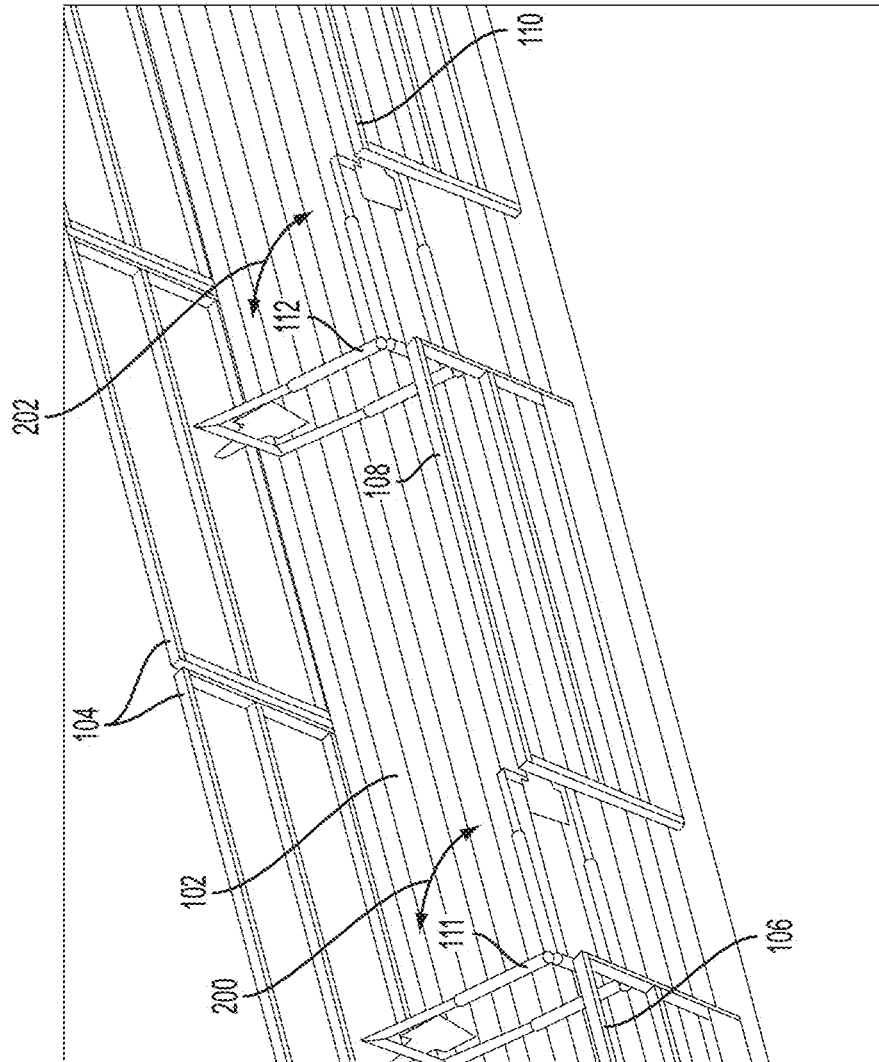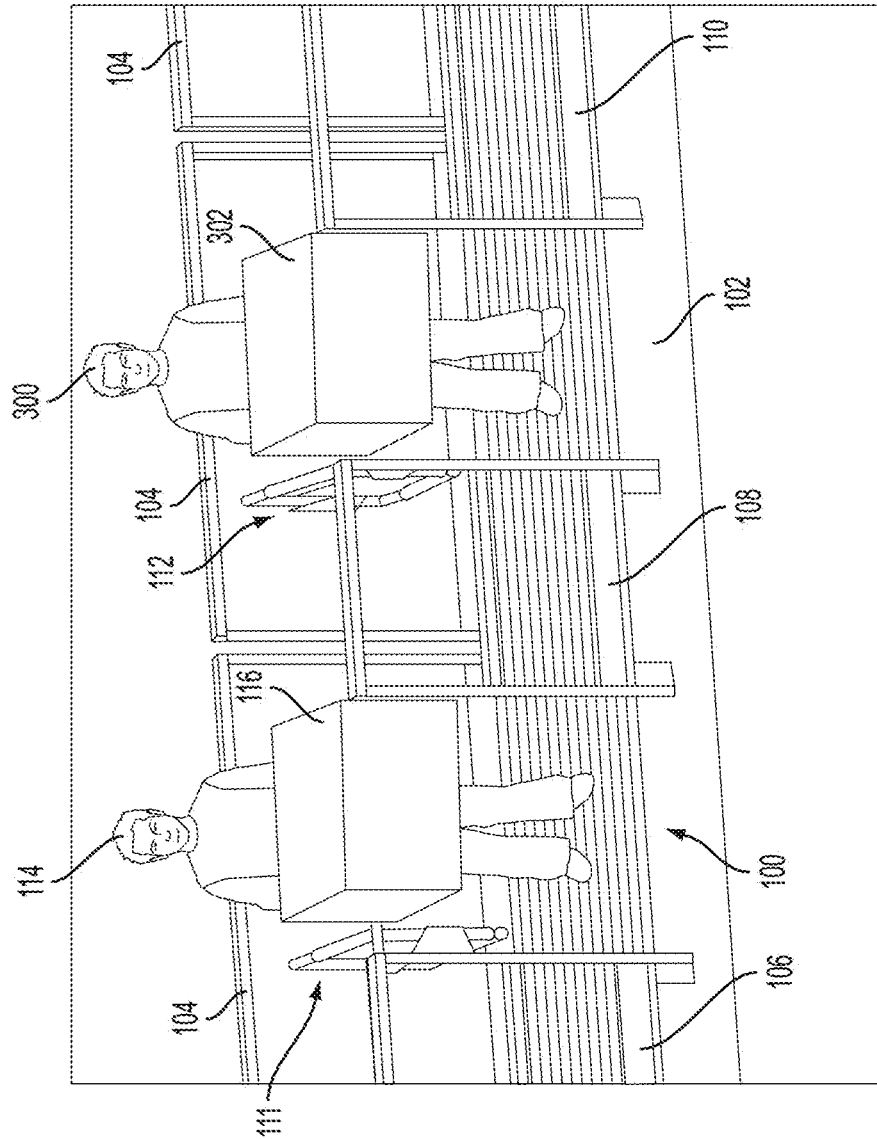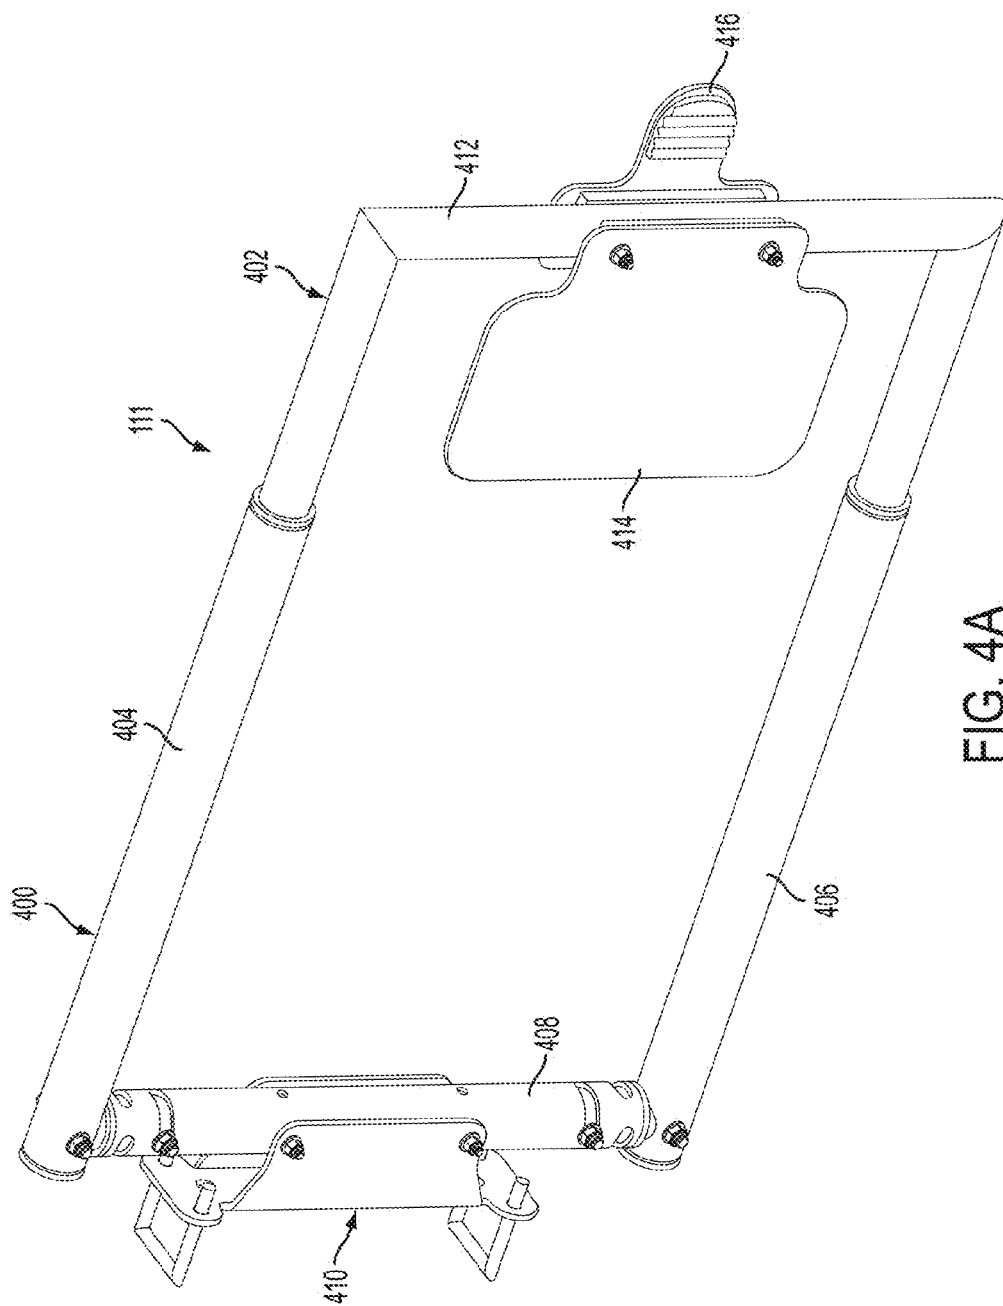

23  
2  
G  
L







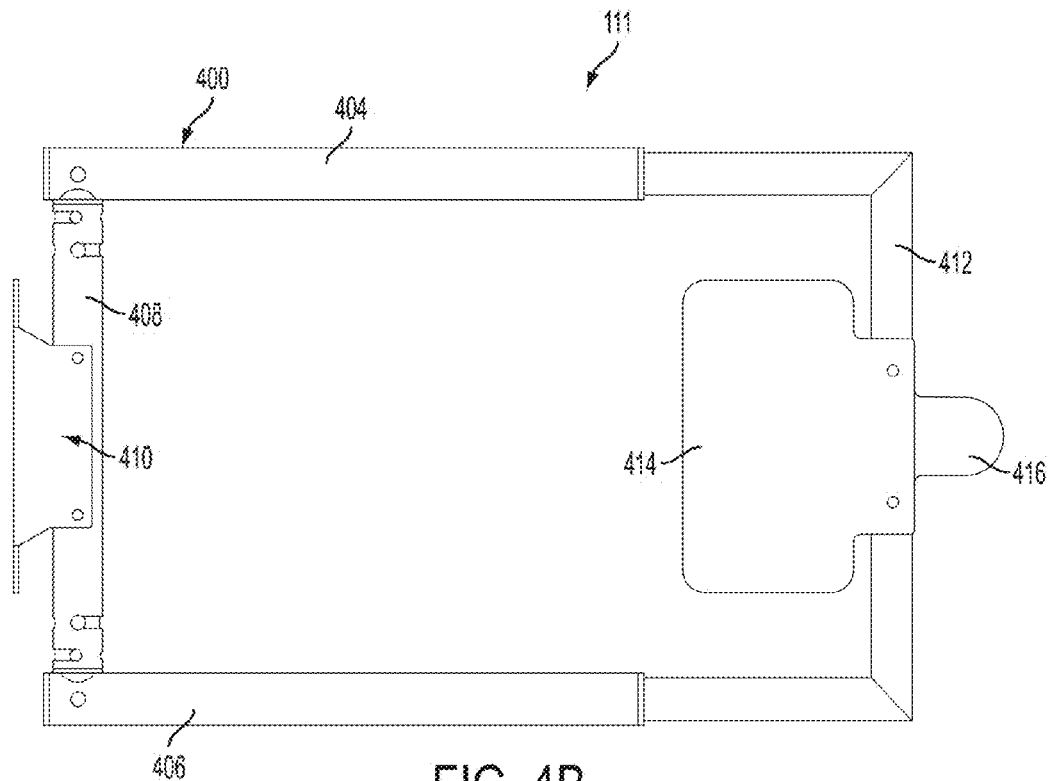


FIG. 4B

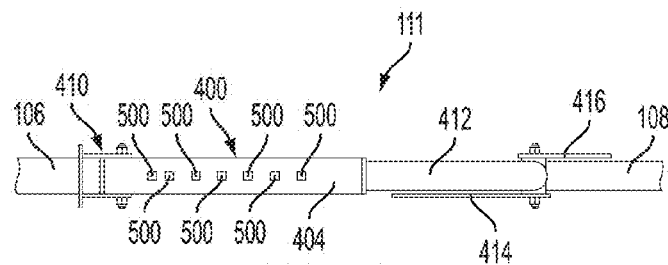


FIG. 5A

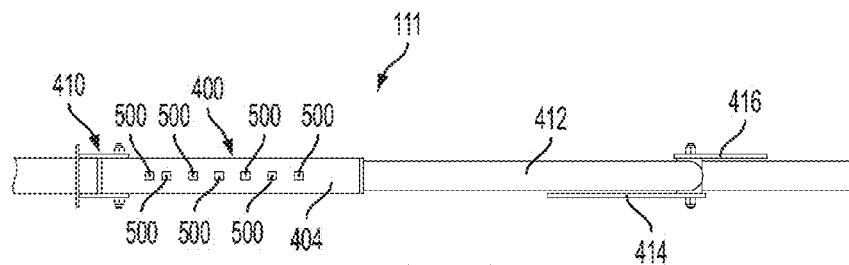
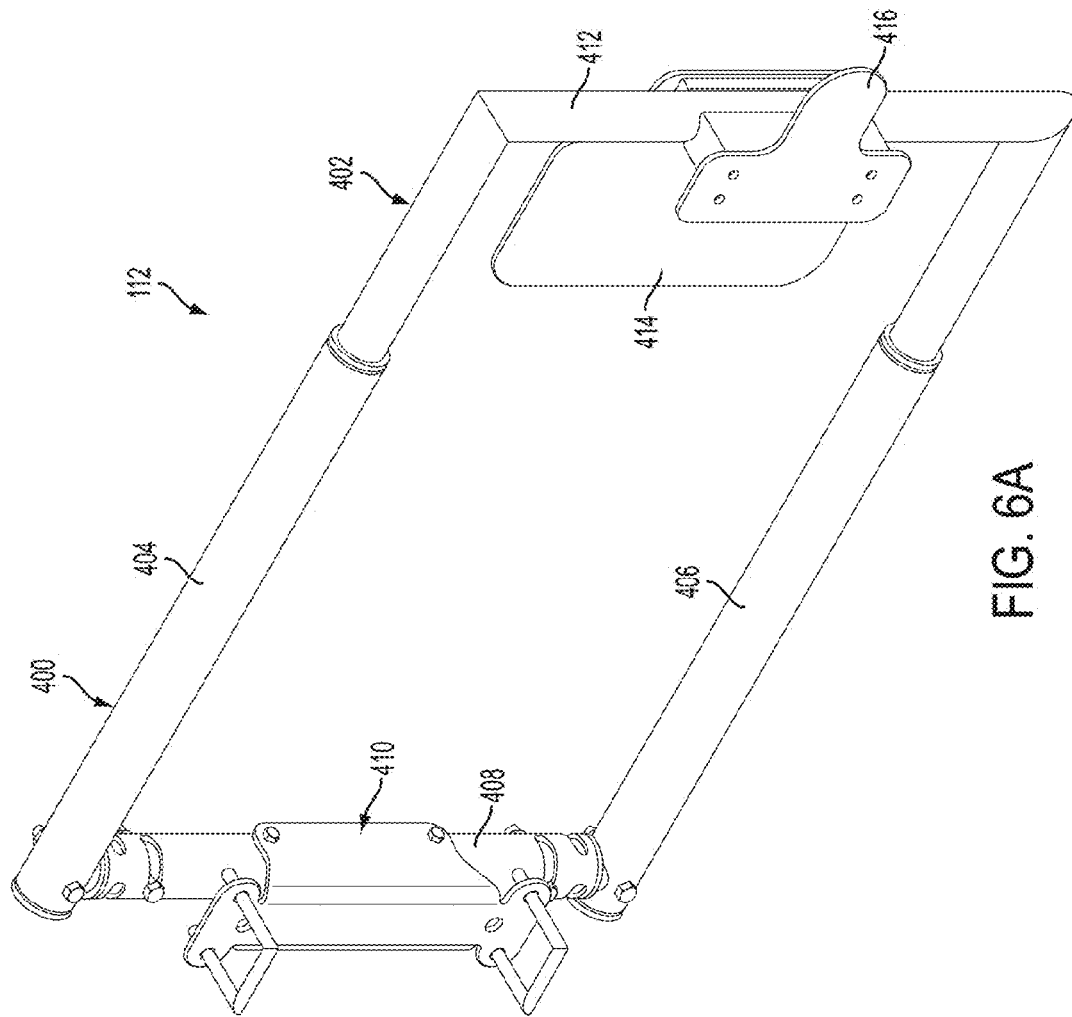
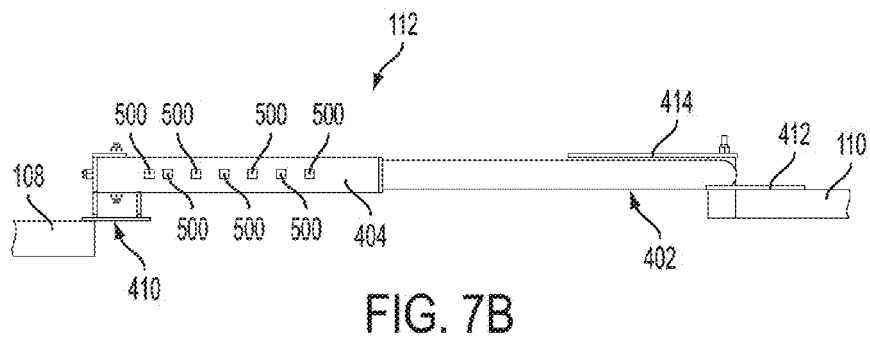
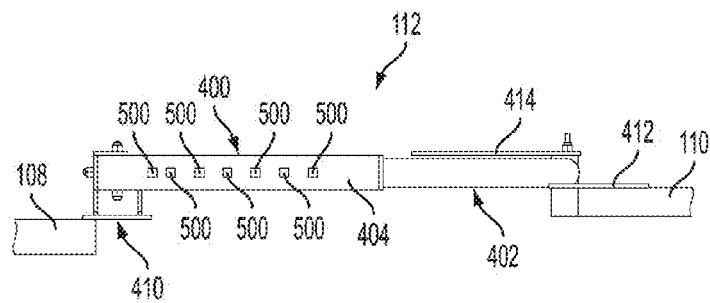
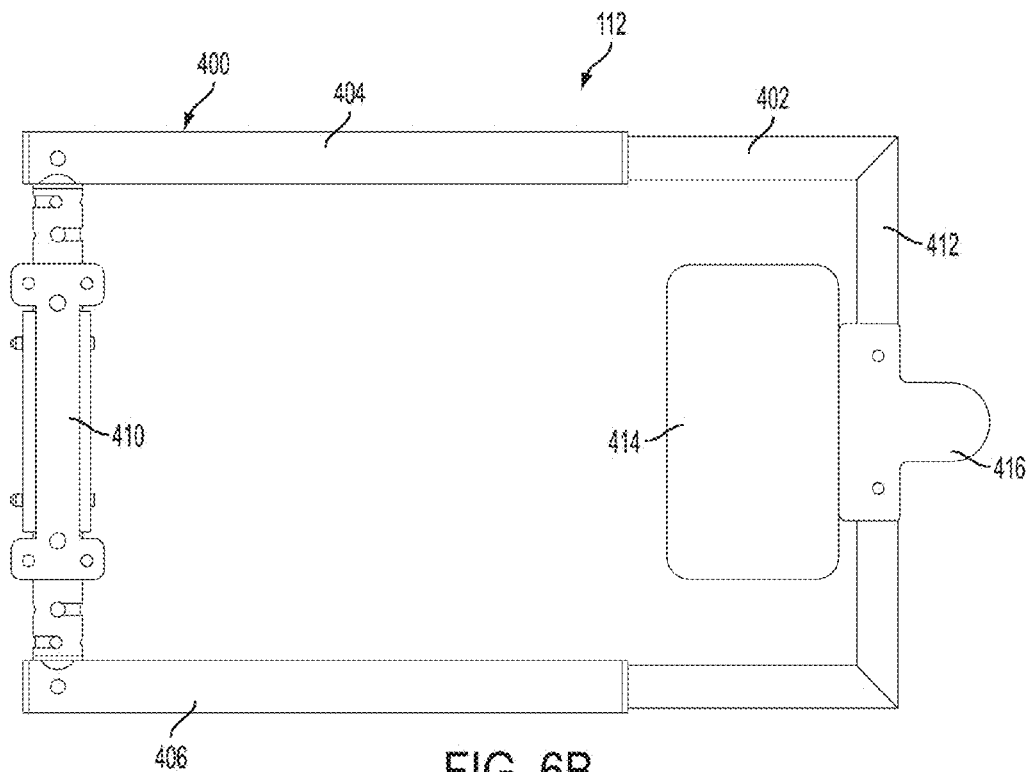


FIG. 5B





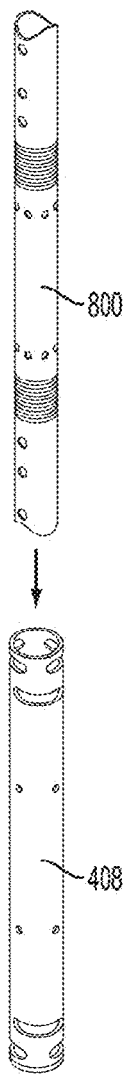


FIG. 8

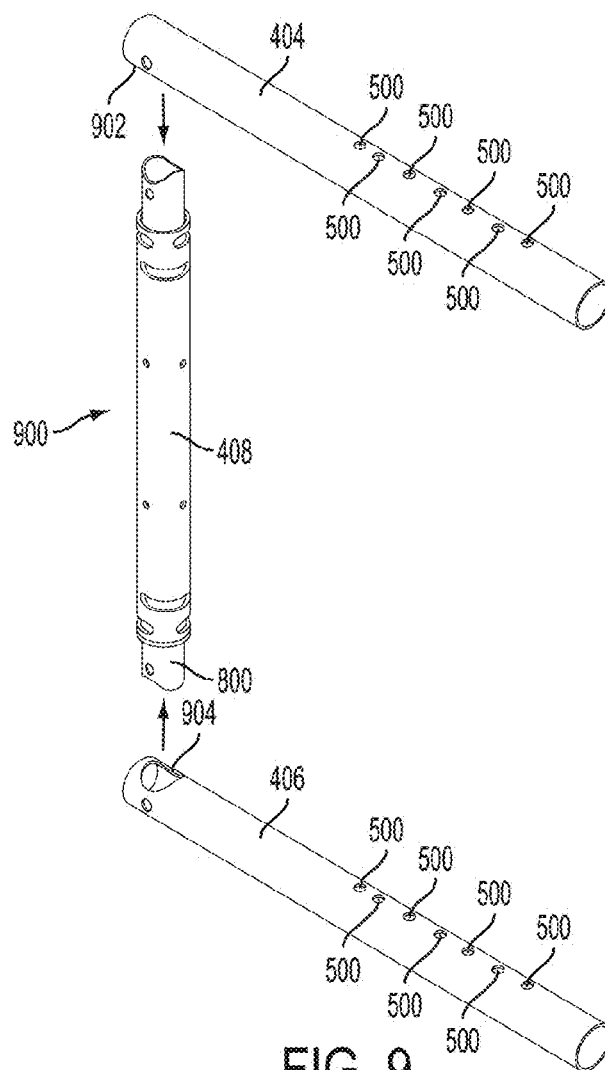
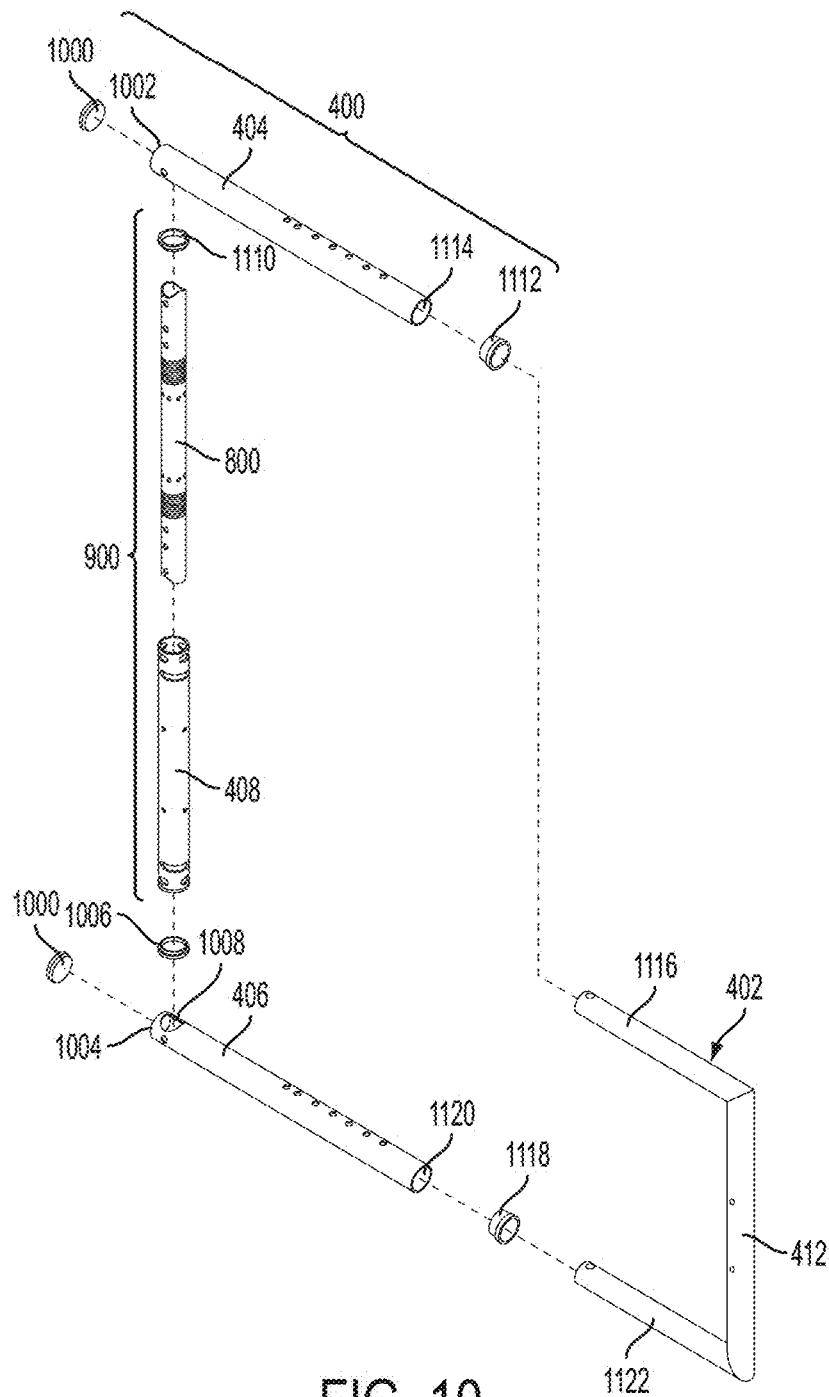


FIG. 9



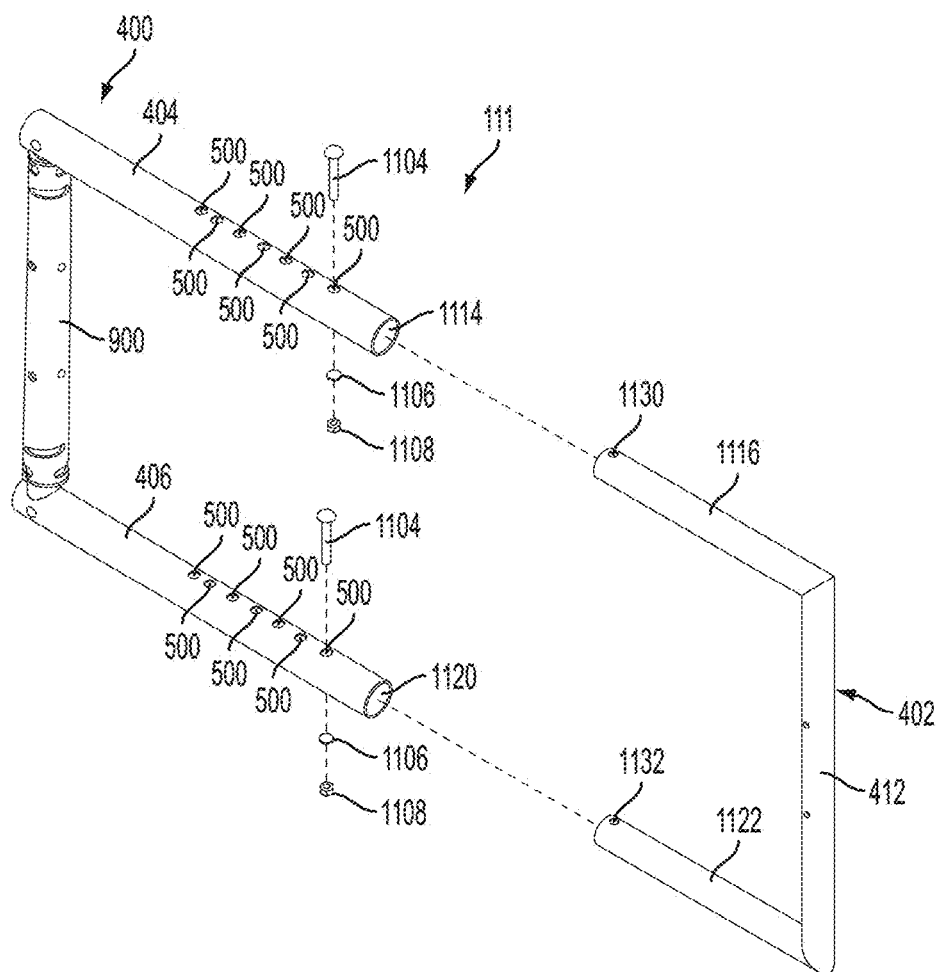


FIG. 11A

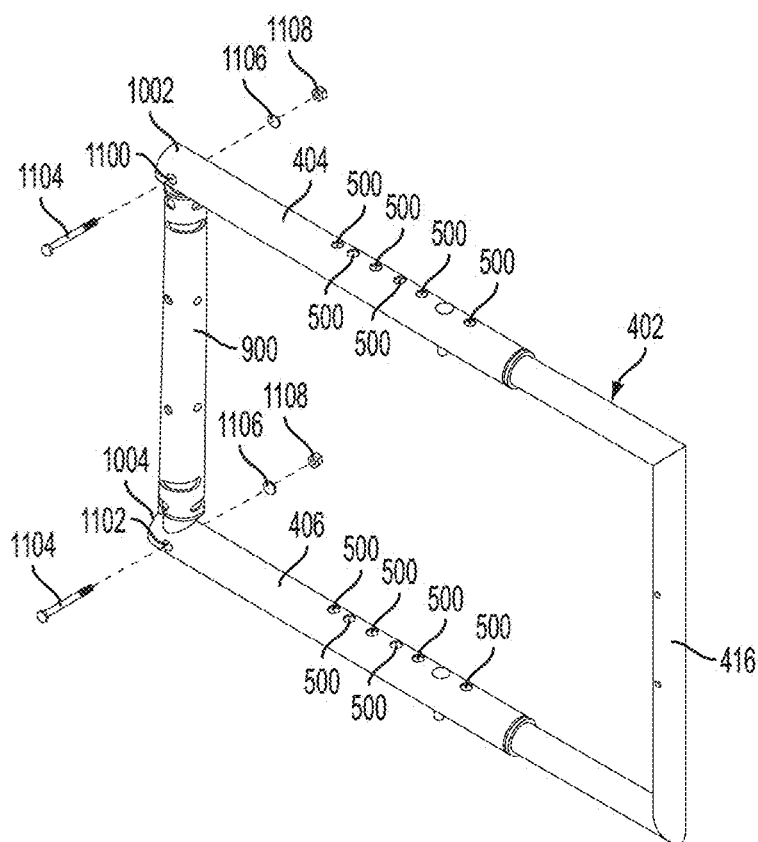


FIG. 11B

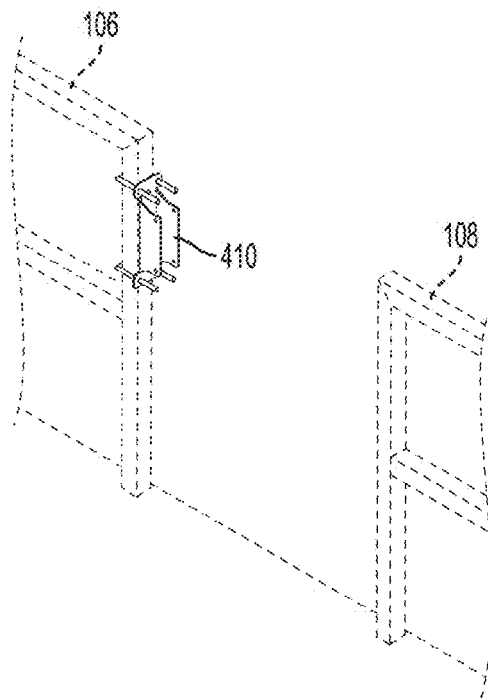


FIG. 12A




FIG. 12B

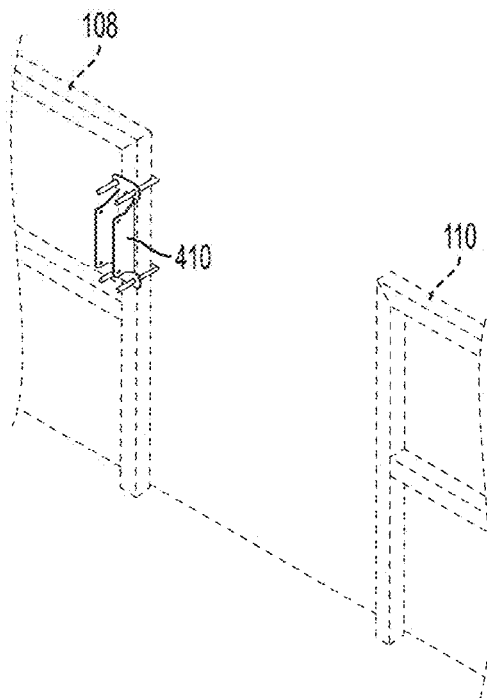


FIG. 13A




FIG. 13C




FIG. 13B



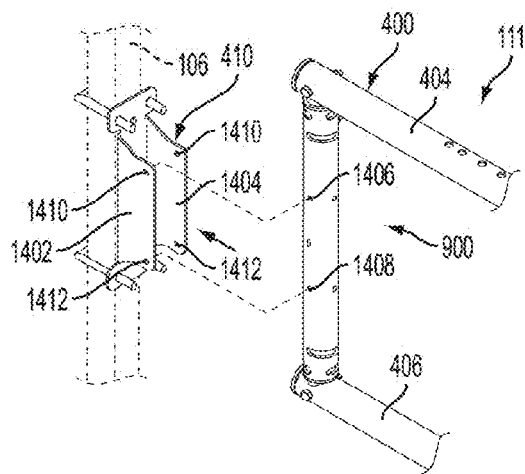


FIG. 14A

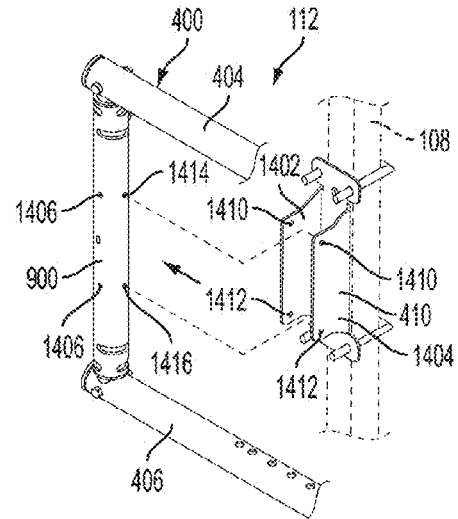


FIG. 14B

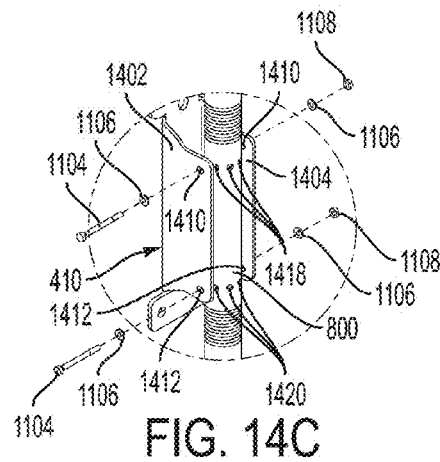
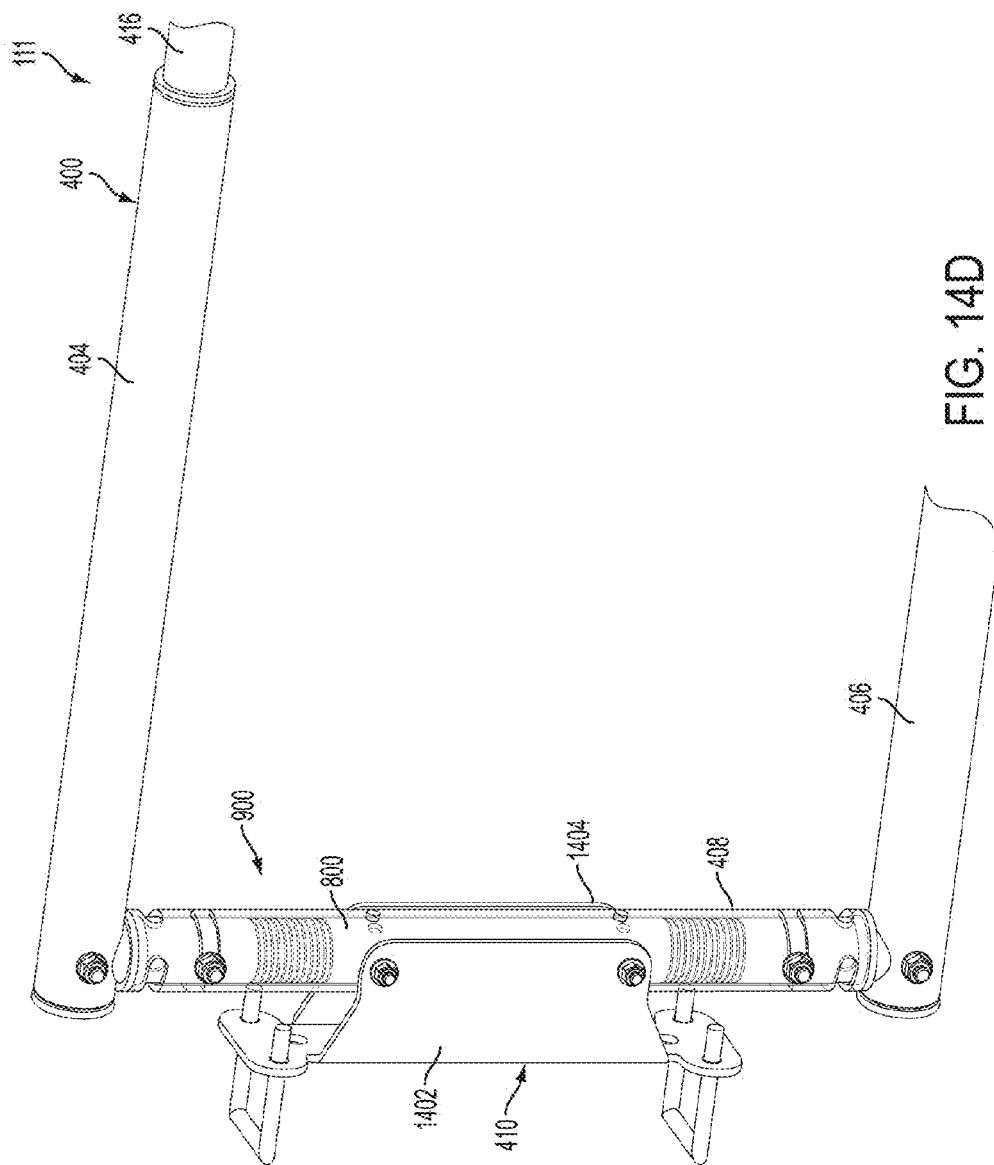


FIG. 14C



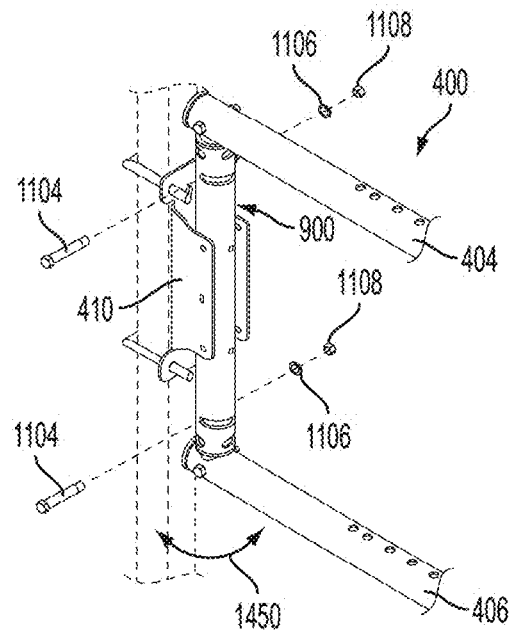


FIG. 14E

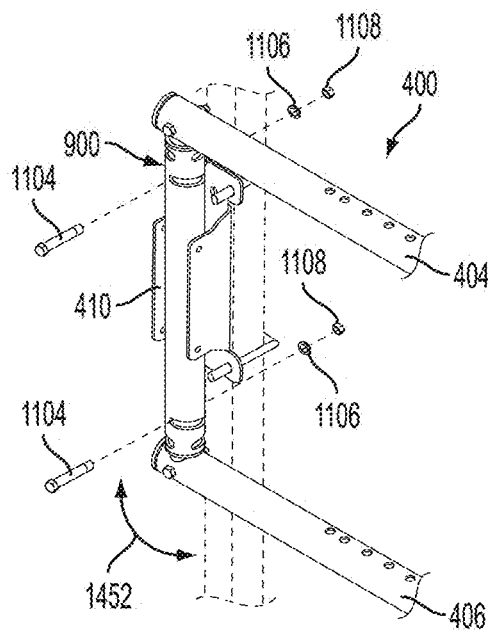


FIG. 14F


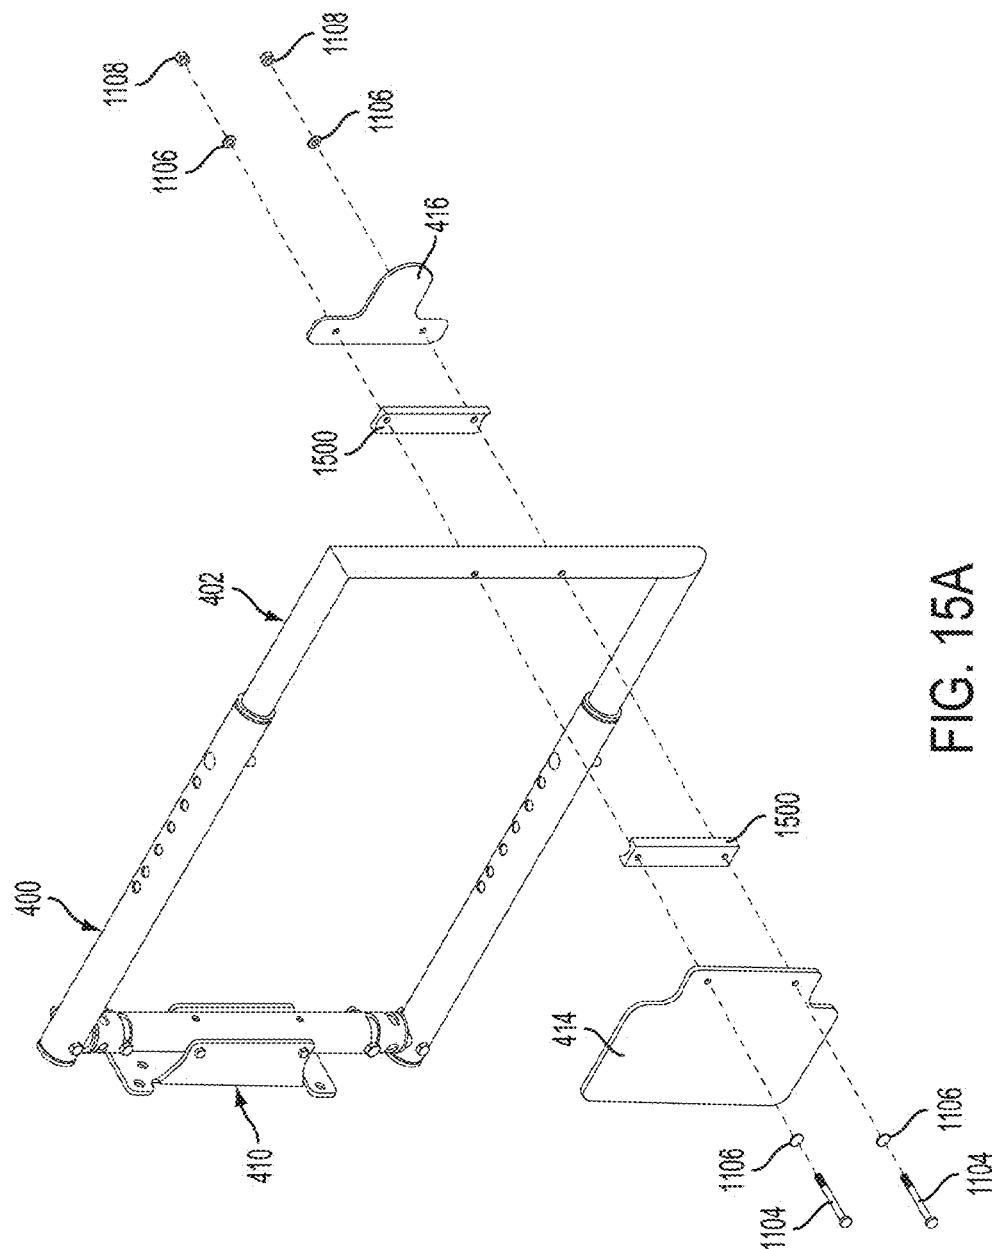


FIG. 15A

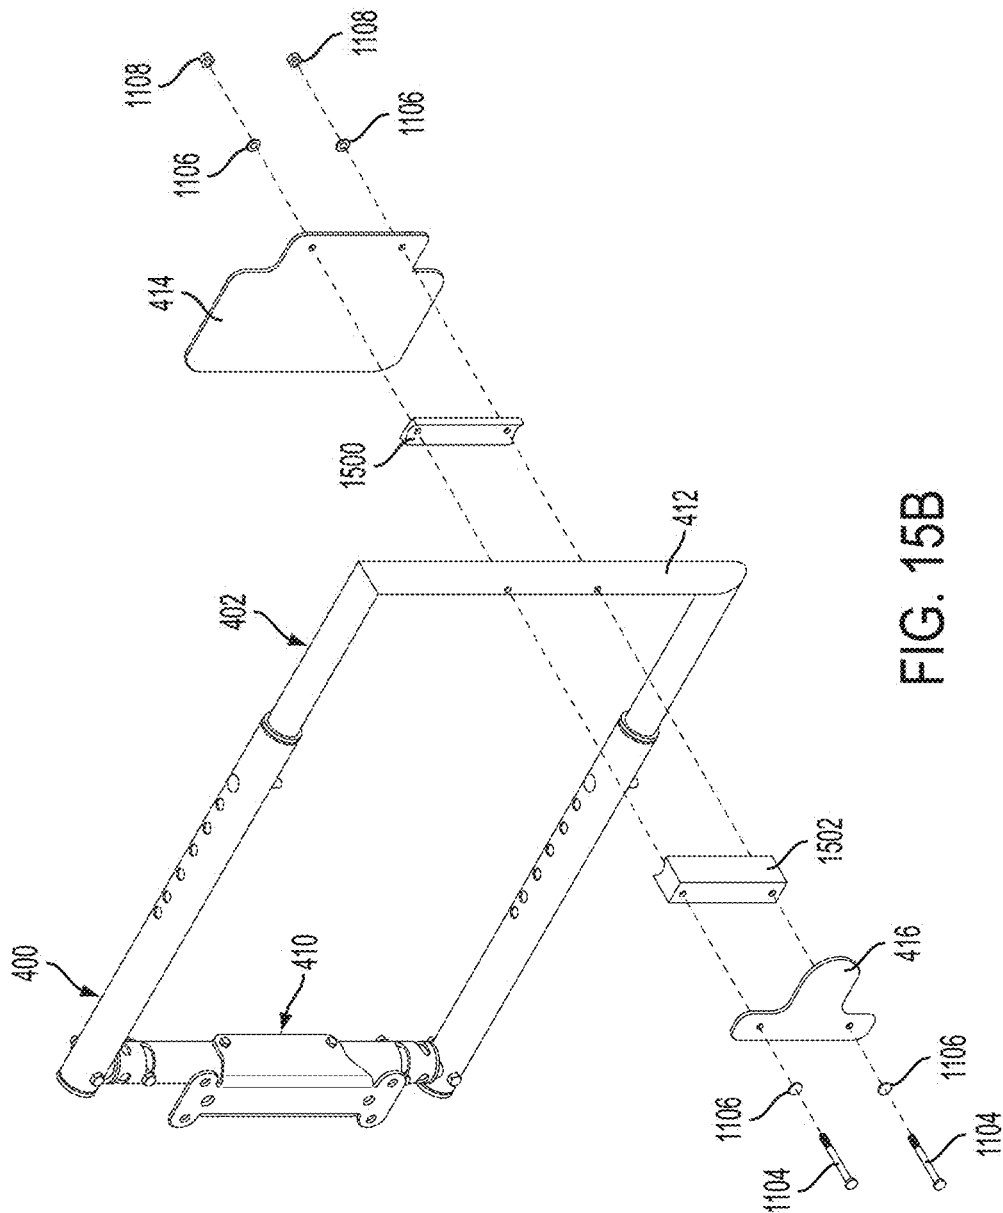

மேல்

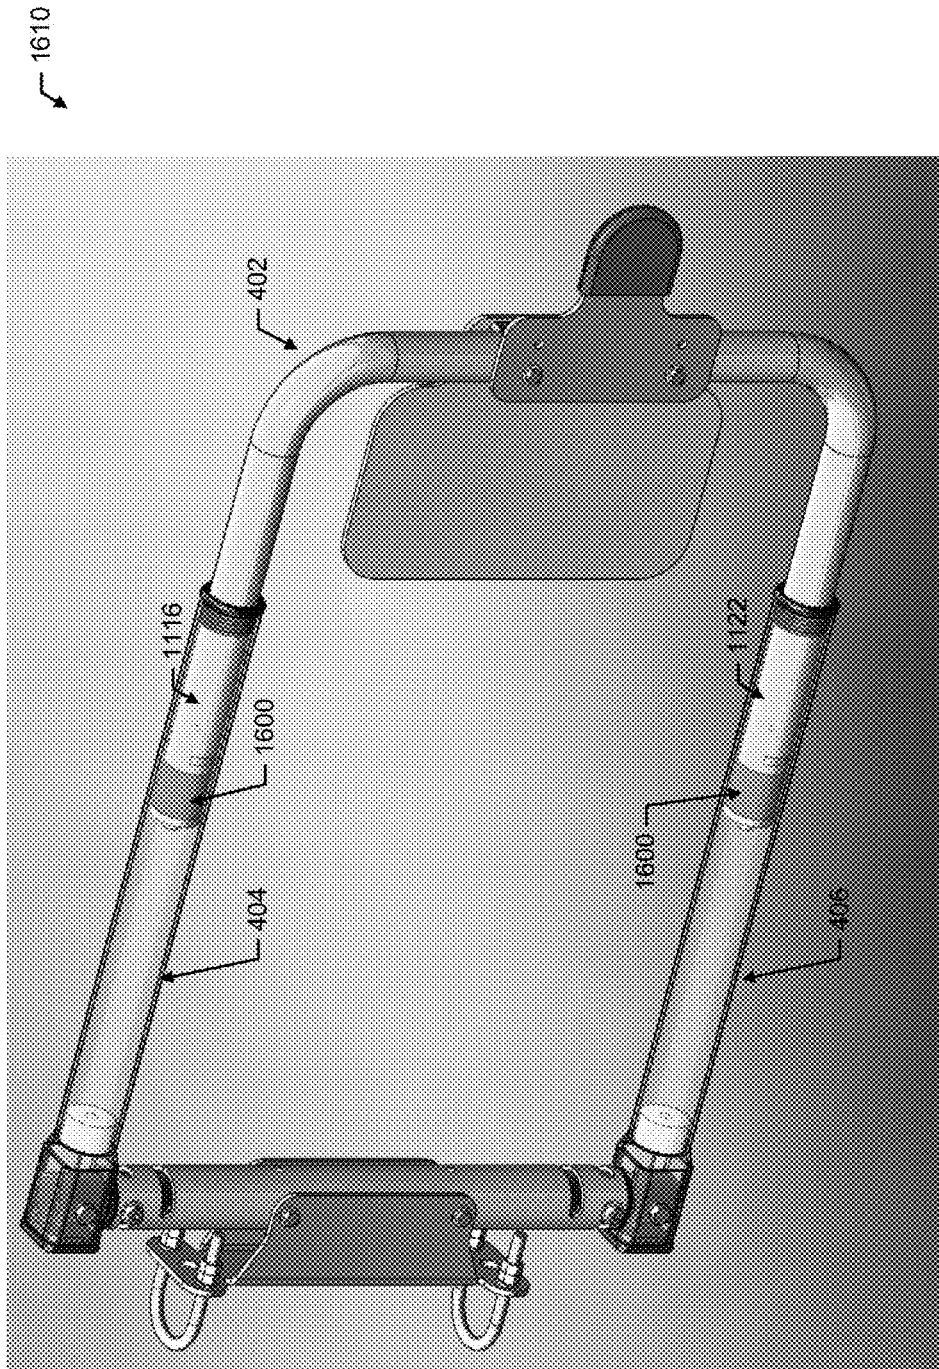


FIG. 16

FIG. 17A

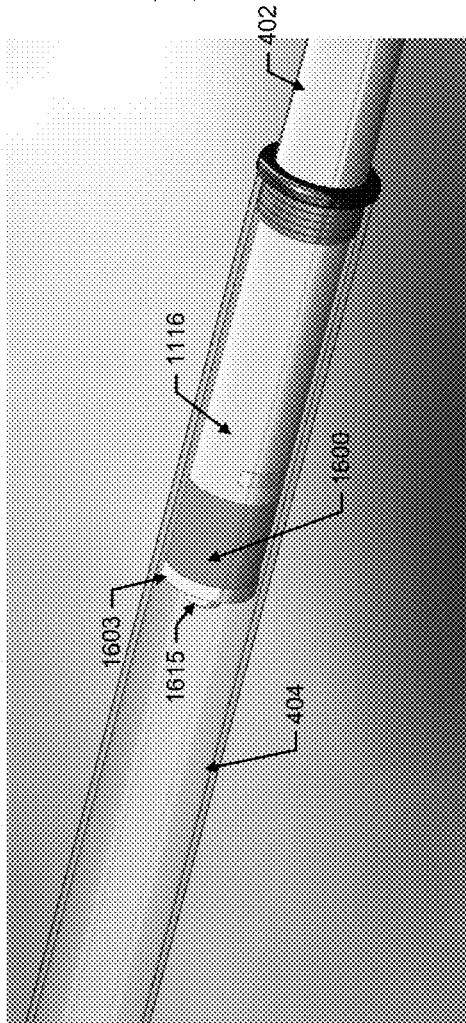
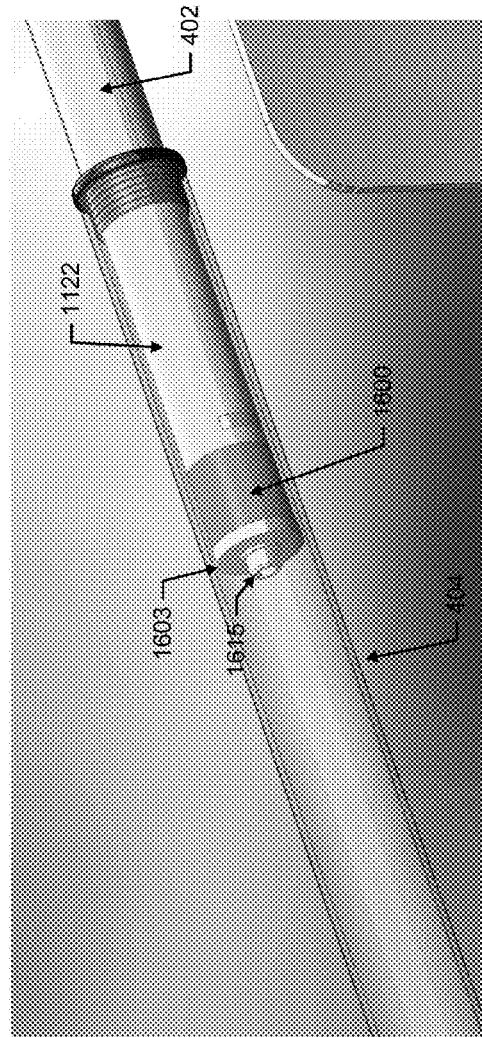


FIG. 17B



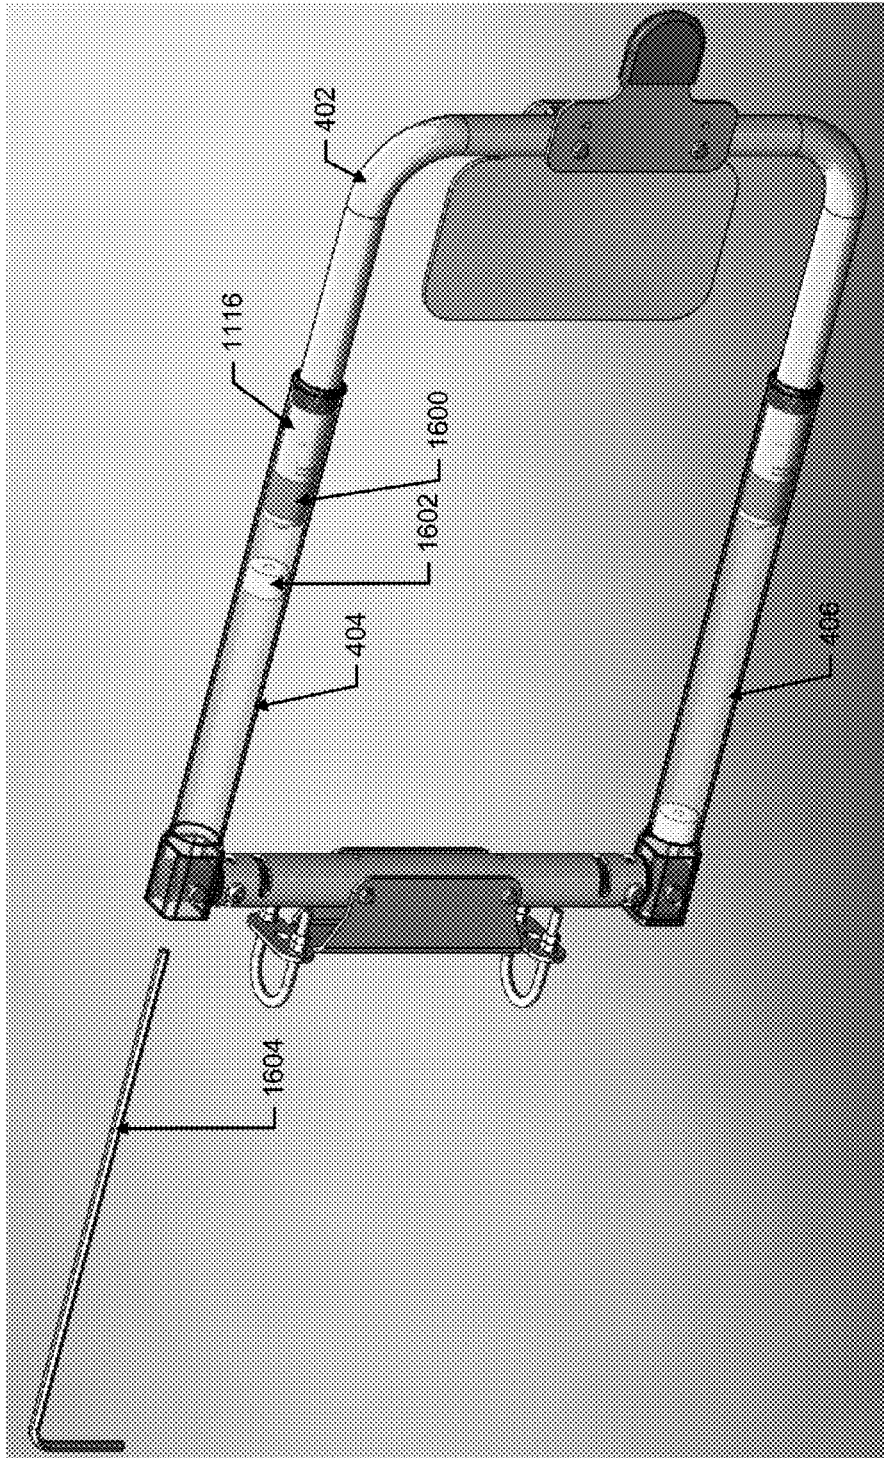


FIG. 18A



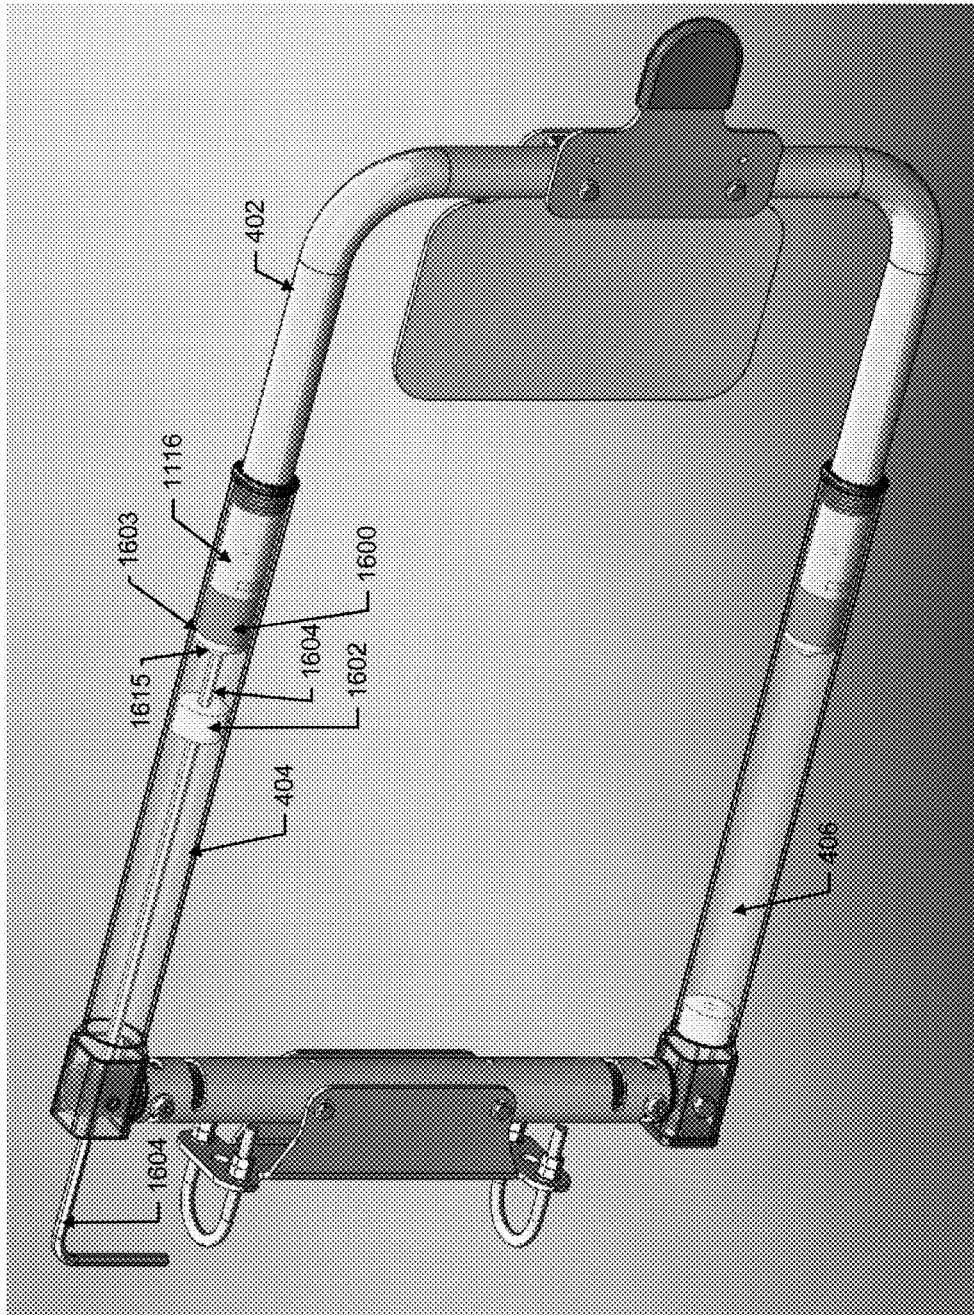


FIG. 18B

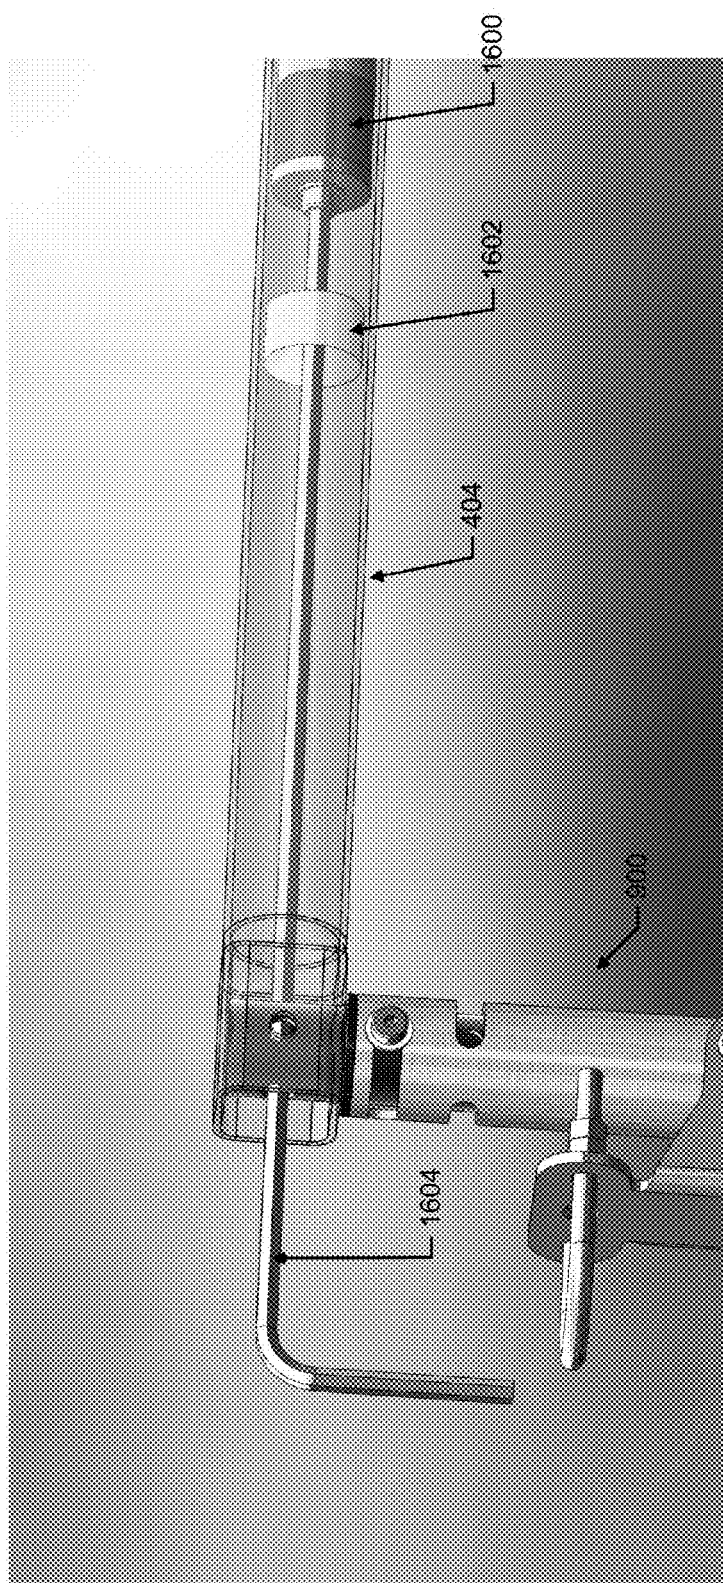


FIG. 19A

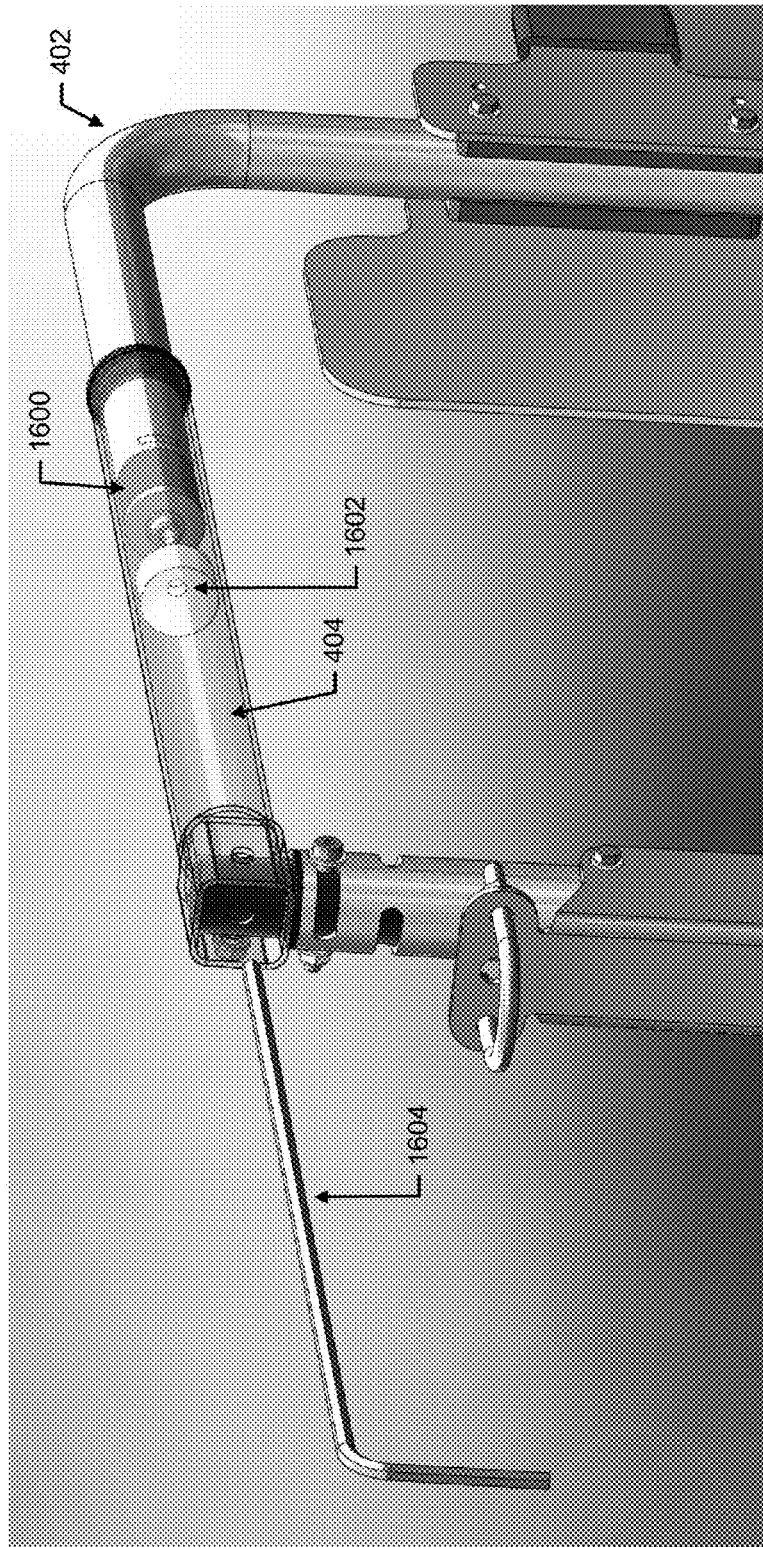


FIG. 19B

# 1 GATE

## CROSS REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of priority to U.S. Provisional Patent Application No. 61/599,276 filed on Feb. 15, 2012 and which is incorporated herein by its entirety.

## FIELD

Embodiments of the present invention relates to fall restraint equipment, and, more particularly, to a swing gate for fall restraint equipment.

## BACKGROUND OF THE INVENTION

Fall restraint equipment may include platforms, ramps, bridges, steps, guardrails, gangways, cages, gates, and other support structures. Gangways, for instance, may be used to provide access to an area, such as the top of a storage container. For example, a semi-trailer truck or a railroad carriage transporting dry goods may need to be unloaded from the container's top. A gangway is used to provide workers a path to unload the material. Additionally, an articulating cage may be lowered from the gangway or, alternatively, from a support structure in order to encase the area from which the material is to be unloaded. Platform systems typically provide access from one location of an area to another. The access points along the platform system or along other portions of fall restraint equipment may provide access to desired locations, such as the top of a railroad carriage, but typically leave a gap in the system or equipment when not in use. Gates may be used to cover the gaps but generally are manufactured to fit the specific dimensions of the gap. Once manufactured, the gate typically cannot be used to cover a gap exhibiting different dimensions.

## SUMMARY OF THE INVENTION

Embodiments of the present invention address the foregoing deficiencies. In some embodiments, aspects of the present invention relate to an adjustable gate which has a pair of supporting arms with interior cavities. An adjustable arm has ends which may be inserted into the pair of supporting arms. At least one of the adjustable arm ends has a system to adjust the length of the gate. For example, the adjustable system may be a rubber compression member that, when adjusted, locks the adjustable arm into place relative to the pair of supporting arms. This allows the gate to be infinitely adjustable.

In another example, apertures may be disposed in the pair of supporting arms and an aperture in the adjustable arm ends align with a desired aperture in the supporting arms so that a pin may be inserted therein to lock the adjustable arm into place relative to the supporting arm.

According to one embodiment, a gate may include a first supporting arm and an adjustable arm. The first supporting arm may include an interior surface and an interior cavity. The adjustable arm may include an insertable end, an adjustable compression member and a compression fitting. The insertable end may be configured to be inserted into the interior cavity of the first supporting arm. The adjustable compression member may be disposed at the insertable end. The compressing fitting may be configured to adjust the adjustable compression member. When the insertable end is inserted into the interior cavity of the first supporting arm, the adjustable com-

# 2

pression member is adjusted to compress against the interior surface so that the adjustable arm is fixed relative to the first supporting arm.

According to another embodiment, a method of operating an adjustable gate may include providing a gate that includes a hinge; a first supporting arm comprising an interior surface and an interior cavity; and an adjustable arm. The adjustable arm may include an insertable end configured to be inserted into the interior cavity of the first supporting arm; an adjustable compression member disposed at the insertable end; and a compressing fitting configured to adjust the adjustable compression member. The method may further include adjusting the compression fitting so that the adjustable compression member expands or compresses within the interior cavity and so that the adjustable compression member compresses against the interior surface so that the adjustable arm is fixed relative to the first supporting arm.

## BRIEF DESCRIPTION OF THE DRAWINGS

A full and enabling disclosure of the present invention, including the best mode thereof directed to one of ordinary skill in the art, is set forth in the specification, which makes reference to the appended drawings that illustrate various components of an adjustable, mountable gate in accordance with various embodiments of the present invention.

FIGS. 1A and 1B are perspective view showing a pair of gates on a gangway in accordance with an embodiment of the present invention.

FIGS. 2A and 2B illustrate the gates of FIGS. 1A and 1B in both open and closed positions.

FIG. 3 is a perspective view showing the gates of FIGS. 1A and 1B swung into an open position.

FIG. 4A is a perspective view of one of the gates of FIGS. 1A and 1B.

FIG. 4B is a side view of the gate of FIG. 4A.

FIGS. 5A and 5B are top view of the gate of FIG. 4A adjusted differently.

FIG. 6A is a perspective view of one of the gates of FIGS. 1A and 1B.

FIG. 6B is a side view of the gate of FIG. 4A.

FIGS. 7A and 7B are top view of the gate of FIG. 4A adjusted differently.

FIGS. 8, 9, 10, 11A and 11B are perspective view showing assembly of various components of a gate in accordance with the present invention.

FIGS. 12A-12B, 13A-13C and 14A-14F show various hinge arrangements and related components for swing mounting of the gate.

FIGS. 15A-15B illustrate installation of a stop system for the gate in accordance with an embodiment.

FIG. 16 is a perspective view of a gate in accordance with another embodiment of the present invention.

FIGS. 17A-17B are enlarged views, partially in phantom, showing an adjustment mechanism for the gate of FIG. 16.

FIGS. 18A-18B and 19A-19B show operation of the adjustment mechanism of FIGS. 17A-17B.

Repeat use of reference characters in the present specification and drawings is intended to represent same or analogous features or elements of the invention.

## DESCRIPTION OF EMBODIMENTS

Reference will now be made in detail to presently preferred embodiments of the invention, one or more examples of which are illustrated in the accompanying drawings. Each example is provided by way of explanation of the invention,

not limitation of the invention. In fact, it will be apparent to those skilled in the art that modifications and variations can be made in the present invention without departing from the scope or spirit thereof. For instance, features illustrated or described as part of one embodiment may be used on another embodiment to yield a still further embodiment. Thus, it is intended that the present invention covers such modifications and variations as come within the scope of the appended claims and their equivalents.

Aspects of the present invention are related to fall restraint equipment. Examples of fall restraint equipment and the components thereof are set forth in copending U.S. patent application Ser. No. 12/329,883 (entitled "A Gangway and Method of Manufacturing Same" and filed on Dec. 8, 2008), Ser. No. 12/468,704 (entitled "Fall Restraint Equipment Component and Method for Manufacturing the Same" and filed on May 19, 2009), Ser. No. 12/487,408 (entitled "Fall Restraint Equipment Component and Method for Manufacturing the Same" and filed on Jun. 18, 2009), Ser. No. 12/537,842 (entitled "Fall Restraint Equipment Components and Method for Manufacturing the Same" and filed on Aug. 7, 2009), Ser. No. 12/552,811 (entitled "Gangway Handrail and Method for Manufacturing the Same" and filed on Sep. 2, 2009), Ser. No. 12/837,480 (entitled "Mobile Access Unit and Cage" and filed on Jul. 15, 2010), 61/366,612 (entitled "Gangway Bearing Retainer Plate" and filed on Jul. 22, 2010), and 61/374,541 (entitled "Articulating Cage" and filed on Aug. 17, 2010). The entire disclosure of each of the foregoing applications is hereby incorporated by reference as if set forth verbatim herein.

The present invention recognizes and addresses the foregoing considerations, and others, of prior art construction and methods.

In this regard, one aspect of the present invention provides a gate that may change sizes and be mounted in different configurations.

FIG. 1A and FIG. 1B (collectively FIG. 1) illustrate two gates **111**, **112** on a gangway **100**. Gangway **100** includes a series of handrails **104**, **106**, **108** and **110** (which may form a cage). Gate **111** is disposed between a first handrail **106** and a second handrail **108** so that gate **111** creates an accessway therebetween. In a similar manner, gate **112** is disposed between a third handrail **110** and second handrail **108** to create another accessway therebetween. Gates **111** and **112** are configured to cover the accessways in one position and when opened, open the accessways. The accessways are sized to allow a user **114** and/or an item **116** to pass therebetween.

Gangway **100** may be placed over a storage container from above according to one embodiment. Storage container (not shown) typically may contain material, such as particulate matter, to be unloaded from the container's top. A platform **102** of gangway **100** provides user **114** an area to walk on gangway **100**.

FIGS. 2A and 2B illustrate perspective views of the gangway of FIG. 1. As illustrated gate **111** may be a parallel-mounted gate and gate **112** may be a perpendicular-mounted gate. Parallel-mounted gate **111** may be aligned to be in line with handrails **106** and **108** such that parallel-mounted gate **111** is aligned (when closed) and disposed in the same plane that is defined by handrails **106** and **108**. Perpendicular-mounted gate **112**, on the other hand, may be such that the gate is (when closed) also parallel to handrails **110** and **108** but is shifted relative thereto such that perpendicular-mounted gate **112** is not disposed in the same plane that is defined by handrails **110** and **108**. In this regard, as illustrated in FIG. 2A, the hinge of perpendicular-mounted gate **112** is mounted on the inside of the cage while the hinge of parallel-

mounted gate **111** is mounted within the same plane that is defined by handrails **110** and **108**.

Additionally, as illustrated in FIG. 2A, parallel-mounted gate **111** swings from a first position to a second position in the back-and-forth directions as referenced using numeral **200**. The mounted hinge on the parallel-mounted gate **111** allows for the pivoting motion thereof in directions **200**. Likewise, perpendicular-mounted gate **112** swings also from a first position to a second position in the back-and-forth directions as referenced using numeral **202**. Perpendicular-mounted gate **112** also has a hinge which allows for such pivoting motion.

It should be understood that each gangway may include one or more perpendicular-mounted gates and/or one or more parallel-mounted gates. For example, as illustrated in FIG. 2A, one perpendicular-mounted gate **112** and one parallel-mounted gate **111** is employed. Additionally, FIG. 2B illustrates two perpendicular-mounted gates may be employed.

FIG. 3 illustrates gates **112** and **111** that have been swung into an open position to create accessways through which users **114**, **300** can access. Users **114**, **300** are supported by platform **102** of the gangway and are carrying an object **116**, **302** through each accessway. As shown the accessway is wide enough so that objects **116**, **302** can traverse therethrough while a user stands on platform **102**.

FIG. 4A and FIG. 4B (collectively FIG. 4) illustrate the components of gate **111** according to an embodiment. Gate **111** includes a body **400** and a connecting system **410**. The connecting system **410** connects the body to handrails of the gangway. The gate body **400** may include a hinge portion **408**, supporting arms **404**, **406**, an adjustable arm member **402**, and a stop system. Each of these components, as should be understood, may not be required to be a part of the system. For example, gate **111** may or may not include the stop system or the connecting system. Nonetheless, the above components is discussed in more depth below.

The supporting arms **404**, **406** may be a hollow tubular piece of continuous metal. These supporting arms **404**, **406** are each configured to receive one end of adjustable arm member **402**. As illustrated in FIGS. 5A and 5B, a bottom view of the parallel-mounted gate **111** is shown as attached to rail **106**. Additionally, FIG. 5A illustrates gate **111** in a retracted position while FIG. 5B illustrates gate **111** in an extended position. As illustrated in FIGS. 5A and 5B, rails **106** and **108** define a plane such that gate **111** is disposed along such defined plane.

Continuing with FIGS. 5A and 5B, one or more supporting arms **404** (and/or **406**) of gate **111** may include adjustment apertures **500**. Each adjustment aperture **500** is spaced a distance along the longitudinal length of each supporting arm **404**, **406**. One or more ends of corresponding adjustment arms **412** have a mating member (not illustrated) which when positioned over an adjustment aperture mates with such aperture such that the adjustment arm **412** then locks into place relative to the supporting arms **404**, **406**. The adjustment arm may then be adjusted by moving the adjustable arm toward rail **106** or rail **108** to retract or extend, respectively, width of gate **111**. In this regard, the mating member is positioned to another adjustment aperture **500** and when the appropriate gate width is reached, the mating member then mates with such adjustment aperture to lock the adjustable arm into position relative to the supporting arm **404**, **406**. In this manner gate **111** is adjustable. It should be understood that the adjustment apertures and mating member system should not be so limited and other adjustable systems may be employed.

Referring back to FIG. 4B, the hinge may include a rotatable member. In this regard, an inner hinge portion may be

5

disposed in an outer hinge portion. The inner hinge portion may include one or more pins which protrude through a track defined in the outer hinge portion. This allows the outer hinge portion to rotate relative to the outer hinge portion. A spring is disposed within the inner and outer hinge portions so that when the gate 111 is swung open the spring exerts a force back onto gate 111 to close.

The stop system may include a base member 414 and a stop member 416. The base member 414 is configured to extend from the adjustable arm 412 toward the hinge. This allows a message to be displayed, to function as a handle or any other manner. The stop member 416 is configured to extend a distance away from the hinge and away from the end of the adjustable arm 412. This allows the stop member 416 to hit rail 108 so that gate 111 will rest against rail 108. Gate 111 therefore may only swing in one direction (e.g., toward the interior of the cage and not exterior to the cage).

FIGS. 6A, 6B, 7A and 7B are illustrations of the perpendicular-mount gate 112. Similar to the parallel-mount gate 111, perpendicular-mount gate 112 also includes a the stop system (including stop member 416 and base member 414), apertures 500, hinge, supporting arms 404, 406 and adjustable arm member 402, according to an embodiment. In this regard, perpendicular-mount gate 112 may be similar to parallel-mount gate 111 except the manner in which perpendicular-mount gate 112 is mounted to rail 108. As illustrated in FIGS. 7A-B, perpendicular-mount gate 112 is mounted to rail 108 so that perpendicular-mount gate 112 is offset therefrom. As such, perpendicular-mount gate 112 is offset and therefore does not reside in an extended longitudinal plane defined by rail 108 or the plane defined between rails 108 and 110.

FIGS. 8-9 illustrate exploded views of some of the components of a gate (whether the gate is perpendicular-mount gate 112 or parallel-mount gate 111) according to an embodiment. As illustrated, each gate may include supporting arms 404, 406 and hinge system 900. As mentioned above supporting arms 404, 406 may be a tubular piece of continuous metal. The supporting arms 404, 406 may have apertures 500 along a portion thereof in which these apertures may be defined in the supporting arms 404, 406 in a straight line.

The hinge system 900 may include an outer hinge portion 408 and an inner hinge portion 800. Outer hinge portion and inner hinge portion 800 may both be a tubular piece of metal. The outer hinge portion 408 is configured to receive the inner hinge portion 800. In this regard, the outer hinge portion 408 is hollow and has an interior cavity. The interior cavity of outer hinge portion 408 has a diameter that is greater than or equal to the diameter of inner hinge portion 800. This allows inner hinge portion 800 to be completely inserted into the interior cavity of outer hinge portion 408. The inner hinge portion 800 and outer hinge portion 408 will now be described below according to some embodiments.

The tubular piece of metal of inner hinge portion 800 may be scored or cut (at a "cut location") so that a first portion of the inner hinge portion 800 can rotate relative to a second portion of the inner hinge portion 800. When the first portion of inner hinge portion 800 does rotate relative to the second portion of inner hinge portion 800, potential energy is created so that a force is exerted on both the first and second portions of the inner hinge portion 800 in a direction to rotate the first and second portions back to the original home or rest position. The inner hinge portion 800 may have one or more scores or cuts to vary the rotational forces on the inner hinge portion 800.

Additionally, inner hinge portion 800 may include at least one pin to be attached thereto as illustrated in FIG. 14D. The pin protrudes through a slot of outer hinge portion 408. The

6

slot is a predefined length and is defined in outer hinge portion 408 in a direction that is in a plane defined by the direction 202 or 200 (i.e., the direction the gate swings in). The slot therefore is configured to only allow the inner hinge portion 800 to rotate a certain degree relative to the outer hinge portion 408. FIG. 8 illustrates the slot being on both ends of the outer hinge portion 408. Additionally, FIG. 8 illustrates that inner hinge portion 800 includes a hole where a pin may be inserted at various locations about the periphery of the inner hinge portion 800. This allows for the location of the pin to be variable to adjust the closing force of hinge 900. It should be understood that the pin and slot system of hinge 900 could be replaced with any other system to facilitate operation of hinge 900. Additionally, it should be understood that the pin may be affixed to inner hinge portion 800 instead of being inserted into a hole in inner hinge portion 800.

Inner hinge portion 800 also includes a first end and second end. At the first and second ends of the inner hinge portion 800, an attachment system is defined or disposed in the inner hinge portion 800 so that the inner hinge portion 800 is fixably attached to the supporting arms 404, 406. For example, as illustrated in FIG. 9, at a first end of inner hinge portion 800 an aperture is defined in inner hinge portion 800 which mates with an aperture in supporting arm 406. The first end of inner hinge portion 800 is inserted into a hole 1008 (see FIG. 10) of supporting arm 406 so that the aperture of inner hinge portion 800 aligns with the aperture of supporting arm 406. A connecting member (shown in FIG. 11B as pin 1104) may then be inserted into the aligned apertures 1100 to fix the first end of inner hinge portion 800 to supporting arm 406 (and a washer 1106 and nut 1108 may be used to secure the pin 1104 in such aperture). The same operation occurs for the opposite end of inner hinge portion 800 and supporting arm 404 so that the opposite end of inner hinge portion 800 is fixably attached to supporting arm 404. As such, arm 404 and arm 406 are fixably attached to inner hinge portion 800.

In one embodiment, as illustrated in FIG. 10, a washer 1006 and 1110 may be inserted into the first and second ends (respectively) of inner hinge portion 800 prior to affixing the first and second ends of inner hinge portion 800 to the supporting arms 404, 406. Additionally, caps 1000 may be inserted at the proximate ends 1002, 1004 of supporting arms 404, 406.

Additionally, as illustrated in FIG. 10, after the hinge is fixed to the supporting arms 404, 406, adjustable arm member 402 is then adjustably (and optionally releasably) attached to the supporting arms 404, 406. In this regard, a first end 1116 of adjustable arm member 402 is inserted into an opening 1114 of supporting arm 404. It should be noted that a washer may be inserted into opening 1114 prior to inserting first end 1116 into opening 1114. Regardless, the adjustable arm member 402 is adjustably attached to the supporting arms 404, 406 by aligning a spring-loaded pin (not shown) at the end of each end 1116 and 1122 with one of the apertures 500 of each supporting arm 404, 406. This allows the spring loaded pin to be disposed in such aligned aperture 500, thereby securing each end at such aperture. For example, at end 1116 a spring-loaded pin is disposed (either being permanently attached or removably attached) at end 1116. When end 1116 is inserted into supporting arm 404, the spring loaded pin at end 1116 then is positioned at one of the apertures 500 of supporting arm 404. The spring loaded pin then is inserted into the desired aperture 500 so that the length of the gate covers the accessway between rail 108 and 110. The same happens for the other end 1122 of adjustable arm 402 with respect to supporting arm 406. In this regard, the adjustable arm member 402 is adjustable by allowing the spring-

loaded pin to be moved to other apertures so that ends **1116** and **1122** move in and out of the interior cavities of supporting arms **404** and **406**. This adjusts the overall length from the hinge **900** to the end **412** of adjustable arm member **402**.

While hinge system **900** is described above and illustrated in the figures as being the hinge of the gates, it should be understood that any other hinge system may be employed instead of hinge system **900** so as to allow supporting arms **404**, **406** (as well as adjustable arm member **402**) to rotate relative to rail **108**.

It should be understood that a spring-loaded pin not be required for the gate to be adjustable. The pin may not be fixed to adjustable arm member **402** and as such may be a fixable member, such as a cotter pin, a straight pin or other device which is simply inserted in an aligned aperture **500** defined in arm **404**, **406** and hole **1130**, **1132** defined at end **1116**, **1122** respectively. For example, as illustrated in FIG. **11A**, a straight pin **1104** is inserted into aperture **500** of supporting arm **404** when aperture **1130** is aligned therewith when end **1116** of adjustable arm member **402** is inserted into supporting arm **404**. Likewise, another straight pin **1104** is inserted into aperture **500** of supporting arm **406** when aperture **1130** is aligned therewith when end **1122** of adjustable arm member **402** is inserted into supporting arm **406**. Each pin is inserted into the respective apertures (**500** of **404** and **1130**; **500** of **406** and **1132**) so that the pin traverses the diameter of supporting arms **404**, **406**. A washer **1106** and nut **1108** (or other locking system) attaches to the end of each pin **1104** to keep pin **1104** in place thereby locking adjustable arm **402** into place. As indicated above, the pin **1104** can be removed and then adjustable arm member **402** can be inserted into supporting arms **404**, **406** more or slide outwardly from supporting arms **404**, **406** to adjust the total length of the gate. After adjustment to the appropriate length, the pin **1104** is then inserted into another aperture **500** for each supporting arm **404**, **406**.

It should be noted that any other securing mechanism may be employed instead of a pin and aperture system and the present invention should not be limited, as discussed later with regard to FIGS. **16-19**.

FIGS. **12-14** illustrate the hinge system **900** being connected to rail **108**. FIGS. **12A**, **12B**, and **14A** illustrate a gate being parallel mounted to rail **108** and FIGS. **13A**, **13B**, **13C** and **14B** illustrate a gate being perpendicular-mounted to rail **108**. Starting first with FIGS. **12A** and **12B**, a bracket **410** is mounted to rail **108** so that bracket **410** is disposed in the accessway between rail **108** and **110**. It is noted that FIG. **12B** illustrates a top view of gate **111** installed parallel-mounted to rail **108**. As illustrated, gate **111** is installed so that the longitudinal length of gate **111** extends in a direction that extends away directly from bracket **410** so that gate **111** is in the same longitudinal plane that rail **108** and rail **110** is in.

FIG. **13A** illustrates bracket **410** mounted perpendicularly to rail **108** such that bracket **410** faces perpendicular to the plane defined by the area between rails **108** and **110**. This allows gate **111** to still be in a plane that is parallel to the plane defined between rails **108** and **110** but shifted a distance therefrom. This is illustrated by FIGS. **13B-C** which is a top view of perpendicular-mounted gate **112**.

FIGS. **14A-C** illustrate how gate **111** and **112** attach to bracket **410**. As illustrated the bracket is respectively mounted to rails **106**, **108** using a base bracket and pins which surround rail **106** or **108** so that bracket member **1410** is fixably secured to rail **108**. Bracket **410** includes two side portions **1402** and **1404** which receive hinge **900**. Apertures **1410** and **1412** align with apertures **1406** and **1408** respectively (or **1414** and **1416**, respectively) and pins are disposed

between such aligned apertures as illustrated in FIGS. **14A-B**. When the pins are inserted therein and attached therethrough using washer **1106** and nut **1108** as illustrated in FIG. **14C**, the hinge and therefore the gate is then fixably and rotatably attached to rail **106** or **108**.

FIGS. **14E-F** illustrate operation of the gate. As illustrated pins **1104** are inserted into hinge system **900** so that the pins protrude through slides tracks in the outer hinge portion. The gate is allows to swing in the direction shown by **1450** and **1452** in the parallel mount gate and perpendicular mount gate, respectively. As previously discussed, as the gate is swung open, a first portion of the inner hinge portion rotates relative to a second portion of the inner hinge portion, thereby creating a force to revert the first and second portions of the inner hinge portions to rotate back to the initial position prior to opening the gate. When the gate is therefore released, the gate swings back to the original position at rest.

FIGS. **15A-B** illustrate the installation of the stop system. Stop member **416** is attached to a plate **1500** and base member **414** is attached to another plate **1500**. Stop member **416** with plate **1500** is then attached to the end of the gate at the adjustable arm portion as well as base member **414** being attached another plate **1500**.

FIG. **16** illustrates a perspective view of gate **1610** according to another embodiment of the present invention. Gate **1610** includes elements similar to gate **111** as discussed above. However, the adjustable arm member **402** has a different means to adjust the length of gate **1610** as opposed to gate **111**. In this regard, gate **1610** includes a compression member **1600** at the end of end **1116** and end **1122** of adjustable arm member **402**. The compression member **1600** may be made of rubber or other material which can compress and when compressed with a surface creates a large enough amount of friction with such surface so that the compression member does not substantially move from such surface. In one embodiment, the compression member **1600** is a rubber washer or tube which is wrapped around both ends **1116**, **1122** of adjustable arm member **402**. Compression member **1600** is adjustable and is in a resting state initially such that the diameter of compression member **1600** is less than the diameter of the hollow interior cavity of supporting arm **404**. As such, compression member **1600** is able to be slid into the hollow interior cavity easily.

As illustrated in FIG. **17**, a compression fitting **1603** is attached to the end of both ends **1116** and **1122** of adjustable arm member **402**. The compression member **1600** is wrapped around the compression fitting **1603**. Compression fitting **1603** is configured to compress compression member **1600** (and/or increase the diameter of compression member **1600**) when the screw portion **1615** is turned. This increases the diameter of the compression fitting disposed underneath compression member **1600** so that compression member **1600** expands to have a larger diameter.

FIG. **18A** illustrates a tool **1604**, such as an allen wrench, which is configured to be inserted into the hollow interior cavity of supporting arm member **404** at an opening proximate to hinge **900** according to one embodiment. The tool **1604** is shaped to mate with screw portion **1615** of compression fitting **1603**.

As illustrated in FIG. **18B** and FIGS. **19A-B**, the tool **1604** is inserted in the hollow cavity of supporting arm **404** and may be guided by a washer **1602**. Washer **1602** has an aperture in the center which guides tool **1604** through the center of the hollow cavity of supporting arm **404** so that the end of tool **1604** can easily be mated with screw portion **1615**. Once tool **1604** is mated with screw portion **1615**, the tool is rotated to increase the compress compression fitting **1603** and, there-

fore, compression member **1600** until the outer surface of compression member is being increasingly compressed against the interior surface of the hollow interior surface of supporting arm **404**. The tool continues to turn until while the compression member becomes more and more compressed with the interior surface of supporting arm **404**. This creates more and more friction between compression member **1600** and supporting arm **404** such that the adjustable arm member cannot be removed from the supporting arm **404** due to the compression and/or friction caused thereby.

To release the compression member **1600** from supporting arm member **404** the tool is again inserted into screw portion **1615** and the tool is rotated in an opposite direction to reduce the diameter of compression fitting **1603**. This also reduces the compression and thus the diameter of compression member **1600** until the outer surface of compression member **1600** is no longer compressed against the interior surface of the supporting arm **404**. The tool may then be removed and the adjustable arm may then be moved to a different position or removed from supporting arm **404**. It should be understood that the adjustable arm **402** may be moved to any continuous position within supporting arm. After moving the end **1116** or **1122** within the supporting arm **404**, **406** respectively, the tool may be reinserted into the screw portion and turned again to lock the adjustable arm member **402** into place relative to the supporting arms **404**, **406**. It should be understood that the tool may be used to tighten a compression member **1600** in arm **404** and/or in arm **406**.

It should be noted that the hinge may be mounted either on rail **108** or **110** and that the gate may swing either in one direction (e.g., toward rail **108**) if mounted to rail **108** or may swing in the opposite direction (e.g., toward rail **110**) if mounted to **110**. In this regard, the gates described herein may be universal with regard to the swinging direction. Additionally, the gate is further universal in that the length is adjustable to fit any opening or accessway as previously discussed. The gate may be parallel mounted so that the gate, when closed, does not extend into the cage (or interior walkway) area at all. However, in the case where a user wants to use the complete opening (i.e., the space from the edge of the opening or accessway at rail **108** and the edge of the other side of the opening/accessway at rail **110**), the gate may be perpendicularly mounted. This allows the hinge to not be disposed in the plane defined by the area between rail **108** and **110**. As such, if there are items that need to be transported through the opening or accessway between rails **108** and **110** and such items are the width of the opening or accessway, the hinge of the gate does not take substantially any of the accessway or opening area since it is perpendicularly mounted thereto.

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate one or more embodiments of the present invention. While one or more preferred embodiments of the invention have been described above, it should be understood that any and all equivalent realizations of the present invention are included within the scope and spirit thereof. The embodiments depicted are presented by way of example only and are not intended as limitations upon the present invention. Thus, it should be understood by those of ordinary skill in this art that the present invention is not limited to these embodiments since modifications can be made. Therefore, it is contemplated that any and all such embodiments are included in the present invention as may fall within the scope and spirit thereof.

What is claimed is:

1. A gate comprising:

a first supporting arm defining an interior cavity having an interior surface;

an adjustable arm comprising:

an insertable end configured to be inserted into the interior cavity of the first supporting arm;

an adjustable compression member disposed at the insertable end; and

a compressing fitting configured to adjust the adjustable compression member by squeezing the compression member in an axial direction so as to increase its diameter without rotation of either the adjustable arm or the first supporting arm,

wherein, when the insertable end is inserted into the interior cavity of the first supporting arm, the adjustable compression member is adjusted to engage against the interior surface so that the adjustable arm is fixed relative to the first supporting arm.

2. The gate of claim 1, further comprising a hinge fixed to the first supporting arm and an adjacent structure to allow the first supporting arm to rotate relative to the structure.

3. The gate of claim 2, wherein the hinge comprises an inner hinge portion that comprises a first portion and a second portion, the first portion being separated by the second portion by scoring or cutting of the inner hinge portion to allow the first portion of the inner hinge portion to rotate relative to the second portion of the inner hinge portion.

4. The gate of claim 3, wherein said inner hinge portion is configured as a tube wherein said second portion of said inner hinge portion is fixed with respect to an outer hinge portion and said first portion of said inner hinge portion is fixed with respect to said first supporting arm.

5. The gate of claim 4, wherein said outer hinge portion is configured as a tube in which said inner hinge portion is received.

6. The gate of claim 2, wherein the hinge is parallel-mounted to the adjacent structure so that the supporting arm resides in a longitudinal plane that is defined by and extends from the adjacent structure.

7. The gate of claim 2, wherein the hinge is perpendicular mounted to the adjacent structure so that the supporting arm is parallel to but shifted a distance from a longitudinal plane that is defined by and extends from the adjacent structure.

8. The gate of claim 1, wherein the compression member comprises an expandable piece of elastomeric material.

9. The gate of claim 8, wherein said compression member comprises an annular sleeve of said elastomeric material and said compressing fitting comprises an annular disc engaging said annular sleeve.

10. The gate of claim 9, wherein said elastomeric material comprises rubber.

11. The gate of claim 1, further comprising a rotation element operatively connected to said compressing fitting, rotation of said rotation element causing axial movement of said compressing fitting.

12. The gate of claim 11, wherein said rotation element comprises a screw portion.

13. The gate of claim 12, further comprising an elongate tool for engaging said screw portion, said elongate tool being inserted through an opposite end of said first supporting arm which is opposite to an end of the first supporting arm into which the insertable end of the adjustable arm is inserted.

14. The gate of claim 13, further comprising an annular washer in said interior cavity of said first supporting arm for guiding said elongate tool.



## 11

15. The gate of claim 11, further comprising a second supporting arm and a second adjustable arm member, whereby the second supporting arm is configured to be received in a hollow cavity of the second adjustable arm member.

16. The gate of claim 15, further comprising a vertical arm segment having a first end fixedly attached to a second end of said adjustable arm opposite said insertable end and a second end fixedly attached to second adjustable arm member.

17. The gate of claim 1, further comprising a vertical arm segment having a first end fixedly attached to a second end of said adjustable arm opposite said insertable end.

18. A gate comprising:

a vertical hinge arrangement;

first and second horizontal support arms connected to opposite ends of said vertical hinge arrangement, said support arms each defining an interior cavity;

an adjustable arm assembly comprising a vertical member and first and second horizontal adjustable arms, a proximal end of each of said horizontal adjustable arms being rigidly and non-rotatably connected to a respective end of said vertical member;

respective distal ends of said first and second horizontal adjustable arms being received in respective interior cavities of said first and second horizontal support arms; and

## 12

at least one of said first and second horizontal adjustable arms having a compression member which can be radially expanded using a tool inserted into the respective one of said support arms without rotation of the adjustable arm to maintain said adjustable arm assembly in position with respect to said support arms.

19. The gate of claim 18, further comprising a mounting bracket configured to mount said gate in a fence opening.

20. The gate of claim 19, wherein said vertical hinge arrangement comprises a spring-loaded hinge.

21. The gate of claim 20, wherein said spring-loaded hinge comprises:

an outer hinge tube fixedly connectable to said mounting bracket;

an inner hinge tube received in said outer hinge tube, said inner hinge tube having a first portion and a second portion movable with respect to each other, said second portion of said inner hinge tube being fixed with respect to said outer hinge tube, said first portion of said inner hinge tube being fixed with respect to at least one of said support arms.

22. The gate of claim 21, wherein said first portion and said second portion of said inner hinge tube is separated by a cut such that said first portion rotates with respect to said second portion.

\* \* \* \* \*

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 9,032,666 B2  
APPLICATION NO. : 13/768179  
DATED : May 19, 2015  
INVENTOR(S) : Robert W. Honeycutt and Carson Allan Jones

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:


In the Specification,

Column 8, line 8, please delete “slides” and replace with --tracks--.

In the Claims,

In Claim 15, column 11, line 1, please delete the number “11” and replace with the number --1--.

Signed and Sealed this  
Ninth Day of February, 2016



Michelle K. Lee  
*Director of the United States Patent and Trademark Office*